




Accessories & Options

Good Faith Guidelines for TV Installations Above a Typical Gas Fireplace

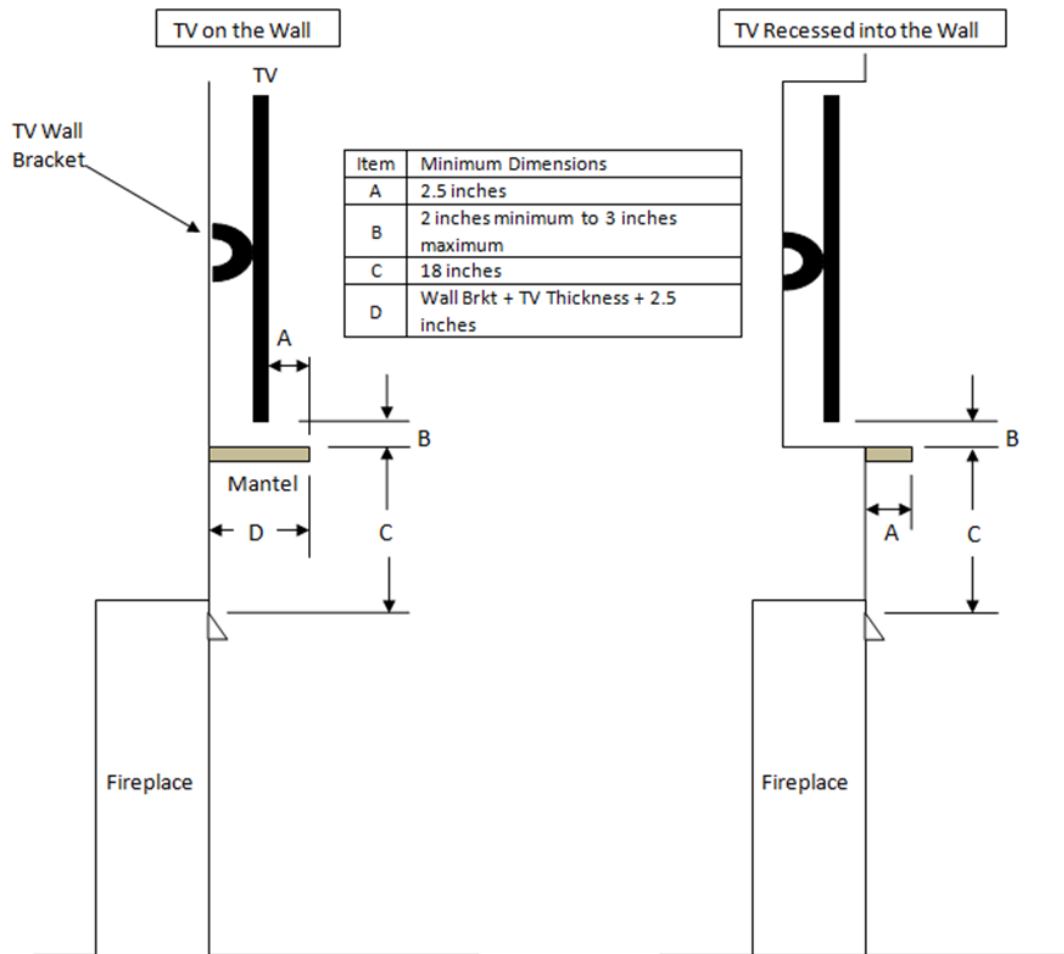

Notes

1. These are good faith recommended clearances only and not a guarantee of compliance with all TV manufacturers' maximum allowable operating temperatures.
2. Since every home has unique air flow characteristics and maximum allowable operating temperatures can vary from manufacturer to manufacturer and from model to model, actual TV temperatures should be validated at the time of each installation. TVs should not be used in situations where the actual TV temperature exceeds the manufacturer's technical specifications. Contact the TV manufacturer directly if you cannot locate this information or have questions regarding this information.
3. Mantel height and depth must conform to the mantel requirements specified in the fireplace installation manual.
4. "C" dimension taken from the top of the hood or fireplace opening.
5. Suggestions on how to further reduce TV temperatures:
 - a. Increase "A" dimension.
 - b. Increase "C" dimension, however, increasing "B" dimension beyond the maximum recommended typically results in higher temperatures.



Thermostat E
Installation Guide

We take your privacy seriously

We're committed to being open and honest about how we use data. We'll always ask for permission before sharing personally identifiable information like your email address, and we keep your data safe with industry standard security tools. To learn more about our Privacy Policy, go to nest.com/privacy

Compatibility

The Nest Thermostat E works with most 24V systems, including forced air, variable speed, heat pump and radiant systems, as well as common fuel types such as natural gas, electricity and oil.

It can control:

- Heating and cooling: one stage of heating and cooling, and a second stage of either heating or cooling
- Heat pumps: with auxiliary and emergency heat
- Fans: one speed

You can check your system's compatibility at nest.com/works

Professional installation is recommended for dual fuel systems (heat pump with furnace).

Watch the video

To see an overview of how to install the Nest Thermostat, visit support.nest.com/thermostat-e


¿Prefieres leer esto en español? Visita nest.com/es-guide




Don't want to install your Nest Thermostat yourself?

The Nest Thermostat is designed for DIY installation, but you can also hire a Nest Pro to do it for you. They'll take care of installation and make sure everything's up and running. Go to nest.com/install to find a Nest Pro installer near you.

In the box




Display



Base



Wall screws



Trim plate

1. Switch off power

This protects you and avoids blowing a fuse in your equipment. To make sure the power is off, change the temperature with your current thermostat and wait at least five minutes to be sure that your system doesn't turn on.



Breaker box


or



System switch


2. Remove the cover

Some thermostat covers pop off, while others need to be unscrewed. Older thermostats may have a second plate that should also be removed to expose the wires.



3. Take a picture of the wires

Take a picture of your thermostat's wires and save it for reference. Make sure you can read the wire terminal labels.

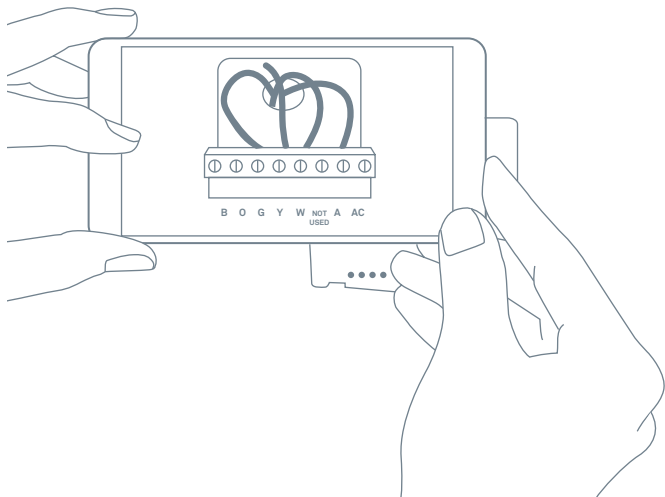


IMPORTANT: If there are two labels on your thermostat's wire connectors, go to nest.com/labels for detailed help and instructions.

Incompatible wiring and voltage


Stranded wires

Stranded wires aren't compatible with the Nest Thermostat.



High-voltage wires

If your thermostat is labeled 120V or 240V, or has thick wires with wire nuts, or has L1 and L2 terminal blocks, your system is high voltage and isn't compatible with the Nest Thermostat.



4. Use the compatibility checker


If you haven't already, go to nest.com/works and enter your thermostat's wires into the compatibility checker.

- Enter only the connectors on your thermostat that have wires in them
- Do not use wire colors – enter the connector labels
- Do not enter any jumper wires into the checker (see step 5)

If your system is compatible, you'll get a custom wiring diagram that you will need to install your Nest Thermostat. You can print it or email it to yourself.

5. Remove any jumper wires

Jumper wires are short wires between two connectors. The Nest Thermostat doesn't need jumpers. If your thermostat has jumpers, remove them, but save them along with your old thermostat.

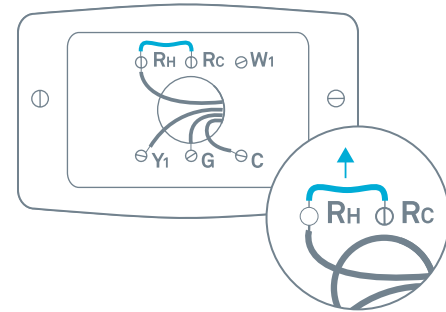


IMPORTANT: If you have Rh and Rc wires, you have a dual transformer system. The Nest Thermostat E is not compatible with dual transformer systems, but you may be able to use the 3rd generation Nest Learning Thermostat.

6. Label the wires

Peel off the labels below and attach them to the thermostat's matching wires.

Note: If you have an Rc or Rh wire, put the R label on it.



┌

┐

└

┘

Wiring tips

Wire colors can vary, but:


- Common or C wires are generally blue.
- If there's an orange wire in the connector labeled both W and O/B, then you likely have a heat pump. Put this wire in the Nest Thermostat's *O/B connector.
- If there's a white wire in the connector labeled both W and O/B, then you probably don't have a heat pump. Put this wire in the Nest Thermostat's W connector.

IMPORTANT: If you're unsure about wiring your thermostat, go to nest.com/install to contact a Nest Pro in your area.

7. Disconnect wires and remove base


After removing the thermostat base, gently wrap the wires around a pen or pencil so they don't fall back into the hole in the wall.

Remember, the power to your HVAC system must be off to avoid blowing a fuse in your equipment.

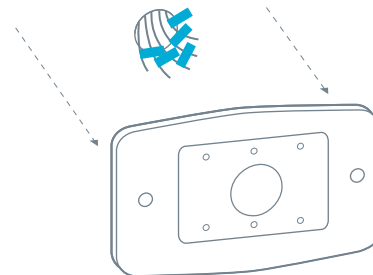

8. Mark where screws will go

Use the built-in bubble level to make sure the base is level.

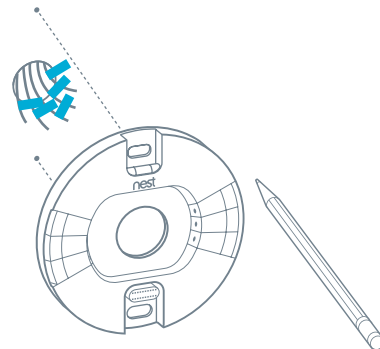


Optional in most homes

Use the included trim plate if needed

If you don't want to paint over holes or marks left by your old thermostat, you can use the optional trim plate.


Snap the thermostat base and trim plate together, then screw the plate to the wall.

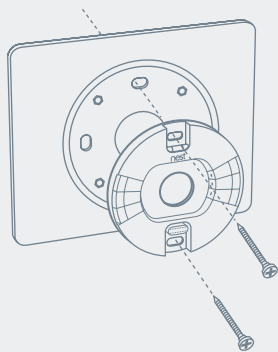

If you have an electrical box


Electrical boxes aren't common, but if you have one, you'll need to purchase a steel plate and screws from nest.com for installation.

Secure the steel plate to the electrical box with two of the screws. Use the other two screws to attach the Nest base and trim plate.

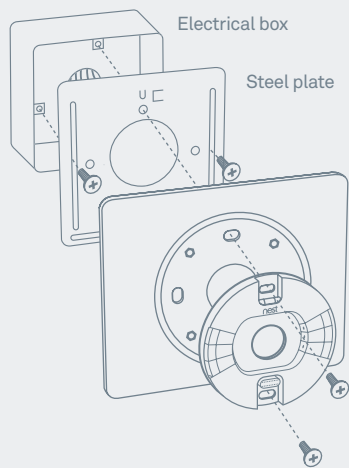

9. Install the Nest base

Pull the wires through the center of the base, then attach it to the wall with the screws.

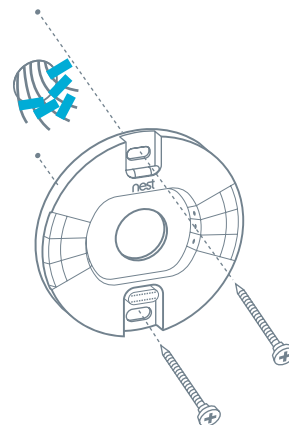

10. Connect wires


Use the wiring diagram you got from the compatibility checker in step 4 to connect your system wires to the Nest Thermostat.



The exposed wire should be straight.


Note: If you have an R, Rc or Rh wire, you can put it into the R connector on the Nest Thermostat.

If you have a W2, Y2 or O/B wire, you can put it into the *O/B connector, if needed.




Gently tug each wire to check they're secure, and make sure each connector that has a wire stays down.

After all the wires are securely connected, push them down to make sure they're flush with the base.



11. Attach the display

Push the display onto the base until it clicks.

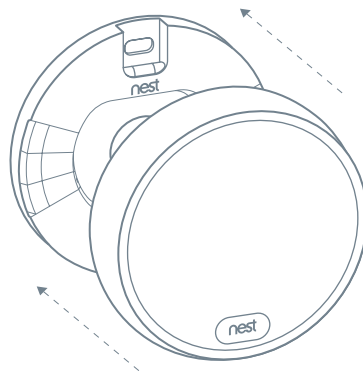

12. Switch the power back on



Breaker box

or



System switch

13. Setup

The Nest Thermostat will turn on and walk you through setup. You can select a language, connect it to Wi-Fi, and tell it some things about your home and system so it can help save energy.

The Nest Thermostat doesn't have a touchscreen. Turn the thermostat display and press it down to select.



14. Control it with the Nest app

Download the free Nest app so you can control your thermostat with your phone. You'll also receive a monthly Home Report that shows your energy use.

You can get the app on Google Play™ or the App Store®, or go to home.nest.com if you don't have a phone handy.




15. Add your thermostat to your account

If you're new to Nest, tap the plus sign on the app home screen, then select Nest Thermostat.

If you already have Nest products in your account, tap the Settings icon, then select thermostat.

The app will show you how to add your thermostat to your Nest Account.

If you need help, visit nest.com/pair



Using your thermostat

Your thermostat can automatically start learning your schedule, or you can choose a schedule with preset times and temperatures. You can edit your schedule at any time.

For help getting started, learning about Nest Thermostat features, energy saving tips and more, go to nest.com/thermostatbasics



Nest Labs, Inc. Limited Warranty Nest Thermostat E

THIS LIMITED WARRANTY CONTAINS IMPORTANT INFORMATION ABOUT YOUR RIGHTS AND OBLIGATIONS, AS WELL AS LIMITATIONS AND EXCLUSIONS THAT MAY APPLY TO YOU.

1. WHAT THIS LIMITED WARRANTY COVERS; PERIOD OF COVERAGE

Nest Labs, Inc. ("Nest Labs"), 3400 Hillview Avenue, Palo Alto, California USA, warrants to the owner of the enclosed product that the product contained in this box ("Product") will be free from defects in materials and workmanship for a period of one (1) year from the date of delivery following the original retail purchase, and if a Nest Pro sells and installs the Product and enters a valid Nest Pro ID during setup, an additional two (2) years, resulting in a warranty period of three (3) years for that Product (collectively, the "Warranty Period"). If the Product fails to conform to this Limited Warranty during the Warranty Period, Nest Labs will, at its sole discretion, either (a) repair or replace any defective Product or component; or (b) accept the return of the Product and refund the money actually paid by the original purchaser for the Product. Repair or replacement may be made with a new or refurbished product or components, at Nest Labs' sole discretion. If the Product or a component incorporated within it is no longer available, Nest Labs may, at Nest Labs' sole discretion, replace the Product with a similar product of similar function. This is your sole and exclusive remedy for breach of this Limited Warranty. Any Product that has either been repaired or replaced under this Limited Warranty will be covered by the terms of this Limited Warranty for the longer of (a) ninety (90) days from the date of delivery of the repaired Product or replacement Product, or (b) the remaining Warranty Period. This Limited Warranty is transferable from the original purchaser to subsequent owners, but the Warranty Period will not be extended in duration or expanded in coverage for any such transfer.

2. TOTAL SATISFACTION RETURN POLICY

If you are the original purchaser of the Product and you are not satisfied with this Product for any reason, you may return it in its original condition within thirty (30) days of the original purchase and receive a full refund.

3. WARRANTY CONDITIONS; HOW TO GET SERVICE IF YOU WANT TO CLAIM UNDER THIS LIMITED WARRANTY

Before making a claim under this Limited Warranty, the owner of the Product must (a) notify Nest Labs of the intention to claim by visiting nest.com/support during the Warranty Period and providing a description of the alleged failure, and (b) comply with Nest Labs' return shipping instructions. Nest Labs will have no warranty obligations with respect to a returned Product if it determines, in its reasonable discretion after examination of the returned Product, that the Product is an Ineligible Product (defined below). Nest

Labs will bear all costs of return shipping to owner and will reimburse any shipping costs incurred by the owner, except with respect to any Ineligible Product, for which owner will bear all shipping costs.

4. WHAT THIS LIMITED WARRANTY DOES NOT COVER

This Limited Warranty does not cover the following (collectively "Ineligible Products"): (i) Products marked as "sample" or "Not for Sale"; or sold "AS IS"; (ii) Products that have been subject to: (a) modifications, alterations, tampering, or improper maintenance or repairs; (b) handling, storage, installation, testing, or use not in accordance with the User's Guide or other instructions provided by Nest Labs; (c) abuse or misuse of the Product; (d) breakdowns, fluctuations, or interruptions in electric power or the telecommunications network; or (e) Acts of God, including but not limited to lightning, flood, tornado, earthquake, or hurricane; or (iii) any non-Nest Labs branded hardware products, even if packaged or sold with Nest Labs hardware. This Limited Warranty does not cover consumable parts, including batteries, unless damage is due to defects in materials or workmanship of the Product, or software (even if packaged or sold with the product). Nest Labs recommends that you use only authorized service providers for maintenance or repair. Unauthorized use of the Product or software can impair the Product's performance and may invalidate this Limited Warranty.

5. DISCLAIMER OF WARRANTIES

EXCEPT AS STATED ABOVE IN THIS LIMITED WARRANTY, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, NEST LABS DISCLAIMS ALL EXPRESS, IMPLIED, AND STATUTORY WARRANTIES AND CONDITIONS WITH RESPECT TO THE PRODUCT, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, NEST LABS ALSO LIMITS THE DURATION OF ANY APPLICABLE IMPLIED WARRANTIES OR CONDITIONS TO THE DURATION OF THIS LIMITED WARRANTY.

6. LIMITATION OF DAMAGES

IN ADDITION TO THE ABOVE WARRANTY DISCLAIMERS, IN NO EVENT WILL NEST LABS BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL, EXEMPLARY, OR SPECIAL DAMAGES, INCLUDING ANY DAMAGES FOR LOST DATA OR LOST PROFITS, ARISING FROM OR RELATING TO THIS LIMITED WARRANTY OR THE PRODUCT, AND NEST LABS' TOTAL CUMULATIVE LIABILITY ARISING FROM OR RELATED TO THIS LIMITED WARRANTY OR THE PRODUCT WILL NOT EXCEED THE AMOUNT ACTUALLY PAID FOR THE PRODUCT BY THE ORIGINAL PURCHASER.

7. LIMITATION OF LIABILITY

THE NEST LABS ONLINE SERVICES ("SERVICES") PROVIDE YOU INFORMATION ("PRODUCT INFORMATION") REGARDING YOUR NEST PRODUCTS

OR OTHER PERIPHERALS CONNECTED TO YOUR PRODUCTS ("PRODUCT PERIPHERALS"). THE TYPE OF PRODUCT PERIPHERALS THAT MAY BE CONNECTED TO YOUR PRODUCT MAY CHANGE FROM TIME TO TIME. WITHOUT LIMITING THE GENERALITY OF THE DISCLAIMERS ABOVE, ALL PRODUCT INFORMATION IS PROVIDED FOR YOUR CONVENIENCE, "AS IS", AND "AS AVAILABLE". NEST LABS DOES NOT REPRESENT, WARRANT, OR GUARANTEE THAT PRODUCT INFORMATION WILL BE AVAILABLE, ACCURATE, OR RELIABLE OR THAT PRODUCT INFORMATION OR USE OF THE SERVICES OR PRODUCT WILL PROVIDE SAFETY IN YOUR HOME. YOU USE ALL PRODUCT INFORMATION, THE SERVICES, AND THE PRODUCT AT YOUR OWN DISCRETION AND RISK. YOU WILL BE SOLELY RESPONSIBLE FOR (AND NEST LABS DISCLAIMS) ANY AND ALL LOSS, LIABILITY, OR DAMAGES, INCLUDING TO YOUR WIRING, FIXTURES, ELECTRICITY, HOME, PRODUCT, PRODUCT PERIPHERALS, COMPUTER, MOBILE DEVICE, AND ALL OTHER ITEMS AND PETS IN YOUR HOME, RESULTING FROM YOUR USE OF THE PRODUCT INFORMATION, SERVICES, OR PRODUCT. PRODUCT INFORMATION PROVIDED BY THE SERVICES IS NOT INTENDED AS A SUBSTITUTE FOR DIRECT MEANS OF OBTAINING THE INFORMATION. FOR EXAMPLE, A NOTIFICATION PROVIDED THROUGH THE SERVICE IS NOT INTENDED AS A SUBSTITUTE FOR AUDIBLE AND VISIBLE INDICATIONS IN THE HOME AND ON THE PRODUCT, NOR FOR A THIRD PARTY MONITORING SERVICE THAT MONITORS ALARM STATE.

8. YOUR RIGHTS AND THIS LIMITED WARRANTY

This Limited Warranty gives you specific legal rights. You may also have other legal rights that vary by state, province, or jurisdiction. Likewise, some of the limitations in this Limited Warranty may not apply in certain states, provinces or jurisdictions. The terms of this Limited Warranty will apply to the extent permitted by applicable law. For a full description of your legal rights you should refer to the laws applicable in your jurisdiction and you may wish to contact a relevant consumer advisory service.

064-00122-US

For more information, visit nest.com
Need help? Contact us at nest.com/support
For FCC Compliance Statement, visit
nest.com/legal/fcc-compliance-notice



Please recycle Nest's packaging.
RECYCLING AND DISPOSAL
Visit nest.com/recycle





THE BRAND YOU TRUST

ALADDIN CONNECT[®]

WI-FI Smart Home Integration



GENIE HOME AUTOMATION

Control and monitor the status of your garage door from anywhere with your smartphone



Download the free app which includes step-by-step programming and instructions.



www.geniecompany.com/aladdinconnect

TAKE COMMAND

If you are like many homeowners, the garage door is the largest and most used entry point to the home. Monitoring who is going in and out of your garage or having the ability to use your smart device to operate the garage door gives peace-of-mind and control.



Give virtual key access to friend, relative, or service person.



Schedule specific hour and minute to close door and/or notify.



Set door to automatically close and/or notify after a set length of time.

Quick Setup Guide

Use the Genie Aladdin Connect® app to control this garage door system.**

Other home automation system apps may also control this Genie garage door opener system. Check our website for updates pertaining to compatible third party systems.

1 Download the app

Download the Genie Aladdin Connect® app from the Apple App Store or Google Play app store. You may also scan the codes below.



Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.



2 Follow app instructions

The Genie Aladdin Connect® in-app instructions will guide you through the setup process. For help at any time contact The Genie Company at 1-866-599-4995 or visit our website: www.geniecompany.com/aladdinconnect




Visit www.geniecompany.com/aladdinconnect for installation and programming videos or Scan the QR code to the left.

3 Install WARNING placard



Place included unintended operation warning placard next to garage door openers wall button.

Location of Aladdin Connect® programming button and LED.

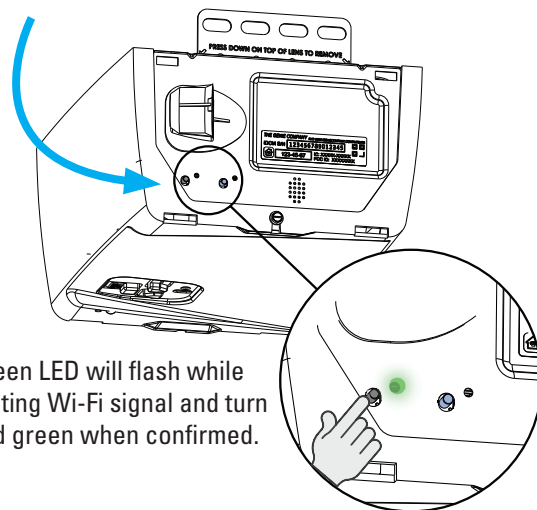

*Green LED will flash while locating Wi-Fi signal and turn solid green when confirmed.

IMPORTANT SAFETY INSTRUCTIONS

WARNING

TO REDUCE THE RISK OF SEVERE INJURY OR DEATH, READ AND FOLLOW ALL INSTRUCTIONS.

1. NEVER let children operate or play with the door controls.
2. Install the entrapment WARNING label next to the wall button or console, in a prominent location.
3. NO ONE SHOULD CROSS THE PATH OF THE MOVING DOOR.
4. NEVER GO UNDER A STOPPED, PARTIALLY OPEN DOOR.
5. The Aladdin Connect™ operating system is designed for unattended operation. The door could move unexpectedly.

SAVE THESE INSTRUCTIONS



© 2018 The Genie Company. Genie, Aladdin Connect and the Genie logo are registered trademarks of GMH Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation.

** Use of this product, the software embedded within this product and the related application software is subject to the Terms and Conditions available at: www.geniecompany.com/aladdinconnect

SMARTPHONE CONTROL

MONITOR
AND CONTROL

SET SCHEDULES

GET REAL-
TIME ALERTS

GET CONNECTED IN MINUTES.

You'll need:

- LiftMaster Wi-Fi® garage door opener (look for the Wi-Fi logo)
- Wi-Fi-enabled smartphone, tablet or laptop
- Broadband Internet connection
- Wi-Fi signal in the garage
- Your home Wi-Fi network password

1

Use your control panel (located on your wall).
Lift the push button and press the learn button.

2

On your Wi-Fi-enabled smartphone, tablet or laptop, go to Settings > Wi-Fi and select the network with the “MyQ®-” prefix.

3

Launch the web browser on your Wi-Fi-enabled smartphone, tablet or laptop, enter **Setup.MyQDevice.com** and follow the on-screen prompts. **Make sure to write down the MyQ serial number.**

4

Download the MyQ App, set up an account and add the MyQ serial number to your account.



For more information on how to connect visit,
WiFiHelp.LiftMaster.com

TrueEASE™

Whole-House Evaporative Humidification Systems

Honeywell



**See What TrueEASE Can Do
For Your Home and Your Comfort**

THERMOSTATS | ZONING | AIR CLEANERS | **HUMIDIFIERS** | DEHUMIDIFIERS | ULTRA VIOLET SYSTEMS | VENTILATION | WATER SOLUTIONS

why humidify your home?

hydrate.
conserve.
save.

Your home is a lot like your body — it needs to stay properly hydrated in order to maintain the comfort of those living in it. Air that's too dry can act like a giant sponge, soaking up moisture from everyone and everything in your home, including woodwork, wood floors and furnishings.

And it takes a toll. Dry skin, chapped lips, dry nasal passages and static electricity are just some of the dry-air symptoms that can lead to discomfort.

TrueEASE



TrueEASE

User-Friendly Meets Eco-Friendly

The ideal humidifier should treat your whole house, improve comfort, reduce energy costs, conserve water, operate quietly and be easy to maintain. Only Honeywell TrueEASE humidifiers do it all.



Whole-House Comfort

Unlike portable humidifiers that are only effective in the rooms they're in, Honeywell TrueEASE humidifiers are installed out of sight with your central heating and cooling system, helping you automatically maintain a comfortable humidity level in every area of your home.

Of course, not all whole-house humidifiers are created equal. TrueEASE is loaded with homeowner-friendly features that set it apart.

Eliminates Maintenance Hassles

While portable humidifiers have water tanks that often need to be filled more than once a day and other whole-house humidifiers need to be taken apart in order to replace the pad, TrueEASE is truly easy to maintain.

TrueEASE automatically fills itself, and the replacement pads can be easily accessed. The slide-out pad design means you won't have to disassemble the humidifier or interact with the plumbing in order to change the pad. And the Change Pad indicator light on the front lets you know exactly when replacement is needed.* Plus, Honeywell replacement pads feature an exclusive AgION™ anti-microbial coating that helps inhibit the growth of mold and bacteria.

Quiet Operation

You'll also appreciate that TrueEASE is the quietest evaporative humidifier on the market. Fan-powered models are 20 dB quieter than equivalent competitive residential fan humidifiers – maintaining your home's tranquility and comfort.

Set It and Forget It



The TrueEASE also features a HumidiPRO™ digital humidistat, so you can simply set the system and forget it. HumidiPRO makes automatic

adjustments when the weather changes to reduce excess condensation and frost on your windows. Or, you can manually adjust HumidiPRO to add a boost of moisture when you want it.

Saves Water. Saves Energy. Saves Money.

When your HVAC system is running, typical whole-house humidifiers constantly cycle water and air through, sending three to four gallons of water down the drain for every one gallon delivered as humidity.

Saving 5,500 gallons of water per year with a Honeywell bypass humidifier is like filling up your bathtub* and draining it every day for 4 months.**

Saving 10,000 gallons of water per year with a Honeywell fan powered humidifier is like filling up your bathtub* and draining it every day for 8 months.**

TrueEASE says goodbye waste and hello efficiency by automatically monitoring the dryness in your home, and then only running water and air through the system when humidity is needed – cutting water waste up to 50%** and saving energy by eliminating the constant cycling of air.

And that's just the beginning. Because humidified air feels warmer, you'll be able to cut energy costs by turning your thermostat down while still feeling comfortable.

You'll also enjoy reduced energy bills because humidified air feels warmer.

* Timer based on 12 months or 5,500 run-time hours, whichever comes first.

** Up to 50% less water waste on Fan-Powered and up to 30% less water waste on Advanced Bypass TrueEASE models. Based on a continuous run time of 24 hours with system specifications set according to ASHRAE Guideline 610.

*** Average 40 gallon capacity bathtub based on "A Day in the Life of a Drop." EPA.gov. Environmental Protection Agency, May 2008. Web. June 2011.

Is TrueEASE Right for You?

Use this list to find out.

TrueEASE is highly recommended if those living in your home ever experience:

- Dry skin
- Dry nasal passages
- Chapped lips
- Unpleasant shocks from carpet or electronics
- Static cling

Or, if your home has:

- Hardwood flooring
- Wood furnishings
- Paintings or artwork
- Musical instruments
- Uncomfortable temperatures in the winter
- High utility bills

TrueEASE humidification systems are backed by a 5-Year Warranty. Ask your heating and cooling professional about selecting the right TrueEASE model for your home.

Learn More

Call toll-free **1-800-328-5111**,
visit **<http://yourhome.honeywell.com>**,
or e-mail **info@honeywell.com**.

Automation and Control Solutions

In the U.S.:

Honeywell

1985 Douglas Drive North

Golden Valley, MN 55422-3992

In Canada:

Honeywell Limited

35 Dynamic Drive

Toronto, Ontario M1V 4Z9

1-800-328-5111

www.honeywell.com

Honeywell

50-1557 RL
June 2013

© 2013 Honeywell International Inc.



We're here if you need us.

As the industry leader in quality storage options for nearly half a century, it is doubtful that you will ever need to take advantage of ClosetMaid's Free Replacement Policy. However, in the unlikely event that you do discover such a defect – or wish to contact us for any reason – there are three easy ways for you to do so:

Call us toll-free: 1-800-221-0641 (U.S.A. and Canada)

Visit our website: www.closetmaid.com

Contact your ClosetMaid® installing dealer:

Keep this card. And keep coming back to ClosetMaid®.

ClosetMaid® offers the industry's largest selection of storage solutions for keeping your home together and running smoothly – all backed by our Free Replacement Policy. Here are a few examples:



MasterSuite® custom laminate shelving systems



A variety of space-saving, affordable wire shelving



An extensive selection of storage accessories




Storage products for the garage and every room in the house

ADJUSTABLE WIRE SHELVING SYSTEM SPECIFICATIONS & INSTALLATION DETAILS

MOUNTING SYSTEMS

Adjustable ShelfTrack™ Hardware System



A Hang Track

B Standard

C Bracket

D Shelving



Hang Track
Use to hang standards.
Creates one step leveling
and eliminates the need
to install each standard
separately which reduces
installation time. Available
in 40 in. and 80 in. lengths.



Toggle Bolts
Use for drywall
installations.




Screws & Anchors
Use for concrete and
masonry installations.




Standard
Attaches to hang track.
Provides adjustable
height options for
hanging shelving. Space
standards no more than
24 in. apart and no more
than 4 in. from each end
of shelf. Available in 12 in.,
30 in., 48 in., 60 in. and
84 in. lengths.




Bracket
Attaches to standard to
support shelving. Use a
bracket that is the same
depth as your shelving.
Available in 12 in., 16 in.
and 20 in. lengths.
(Exception: 16 in. Shelf &
Rod installation requires
a 12 in. bracket.)



Shoe Shelf Support
Attaches to standard to
support shelf at an angle
for shoes. Shelf should be
installed lip up to keep
shoes in place.



Small End Caps
Large End Caps
Use on cut ends of
shelving to protect
shelving to protect
clothing. Available in
large (Shelf & Rod) and
small (SuperSlide, Close
Mesh, and Shelf & Rod)
shelving sizes.



S&R Shelf End Cap
Use on cut ends of Shelf
& Rod shelving to
protect clothing.




TotalSlide® Shelf Stop
Use on cut ends of
TotalSlide shelving to
protect clothing.


Optional Hardware



Corner Support
For corner installations.
Supports front lip of
shelving to keep it level
where it meets another
shelf in the corner.



**0.5 in. Square Aluminum
or Steel Pole 71 in. & 85 in.**
Use in place of support
brackets when stacking
two or more shelves. Steel
poles are pre-drilled.



Pole Clip & End Caps
Attaches to pole to
support shelving in a
center stack. Pole 11700
and 11800 use self-
drilling screws.
S&R Version: 97700
Linen/SuperSlide Version:
97800
TotalSlide Version: 95200
End Caps: 24700



Universal Shelf Support
Attaches to the back of
shelving to support shelf
at an angle for shoes. Shelf
should be installed lip up
using wall clips to keep
shoes in place.



Universal Joiner Plate
Use to join two shelves
together to create
a continuous run of
shelving. Does not work
for Close Mesh

Shelving Types



SuperSlide®/Linen

The top-of-the-line, continuous-slide closet solution. Available in 12 in. and 16 in. depths. Use in conjunction with SuperSlide hardware. Use as linen shelf without rod.



TotalSlide®

Our quickest and easiest to install, one-piece, continuous-slide closet solution. Available in 12 in. and 16 in. depths.



Shelf & Rod

The economical closet solution. Available in 10 in., 12 in., and 16 in. depths with your choice of a 10 in. or 12 in. hang bar location as measured from the back wall.



Close Mesh


Works best with ShelfTrack for storing small pantry items. Deck wires are 0.63 in. on center vs. 1 in. on center on all other shelving. Available in 6 in., 9 in., 12 in., 16 in. and 20 in. depths.



Linen

The perfect answer to every basic shelving need in every room. Available in depths of 6 in., 9 in., 20 in. and 12 in. double lip.

SuperSlide® Hardware




Closet Rod Support

Attaches to SuperSlide shelving to support closet rod. Use one every 36 in. at each end.



0.75 in. Closet Rod

Snaps into closet rod support to allow hangers to slide without interruption.



Internal Closet Rod Cap

Use on ends of closet rods to keep hangers on rod.



Corner Closet Rod

Use with SuperSlide shelving to create uninterrupted sliding action around corners. Support with closet rod supports.

Installation and Materials Specifications

HangTrack, Standards and Brackets:

Horizontal track mount, level track, secure with screws and/or mollys in studs or drywall. Horizontal track can also be mounted to the top wall/ceiling plate with #12 x 2 in. pan head screw #287600. Secure to at least one stud. Vertical installation of standards no more than 24 in. apart on studs. Attach shelf brackets which can be used with SuperSlide, Heavy Duty, Linen, Shelf & Rod and Close Mesh 12 in., 16 in., or 20 in. Decking.

End brackets to support the front of the shelves:

Install on the same level line as the wall clips and center on the front rods of the shelves. All shelves must be front supported a maximum of every 36 in. with an end bracket, support bracket or pole. End brackets #94000, #94100, #94200 (for SuperSlide®), #93200, #93300 (other shelves).

Drywall:

Drill 0.25 in. hole, insert #91000 or #91100 wall clip. Use #8 pin to expand anchor.

Wood:

Drill 0.25 in. hole into wood. Secure wall clip with #8 1 in. screw, or secure pole clip #97800 directly to wood with #8 1.25 in. screw #22800.

Concrete:

Drill 0.25 in. hole with masonry bit. Insert wall clip #91000, secure with #8 1 in. screw #20800.

Pole:

Use pole clip #97800 for linen shelving and clip #97700 for Shelf & Rod shelving on pole #21700 or #211800. Pole #211800 recommended for SuperSlide installation.

Corner Support Brackets:

Use on all corner "butt" joints #12000.

Cutting Shelves:

Shelves are to be cut 0.5 in. to a maximum of 1.38 in. shorter than the actual wall measurements or the desired shelf length.

All exposed cut ends are to be capped with #20300 or #20400 depending on the shelf.

SuperSlide Component Installation:

Place hang bar supports #92500 or #567200 every 24 in. to 36 in. (place support bracket #116400 adjacent to support) use SuperSlide end bracket #97900 or #98000 at side wall where pole is used. Use 12 in. support brackets for 12 in. or 16 in. depth shelves. Place pole caps #208300 or #208100 on cut end of pole. Use pole connector #208500 to connect two pieces of 0.75 in. hang bar #201200 (white) or #207100 (chrome). When using pole connector, joint must rest in #92500 or #567200 bracket. For wall installation, use end bracket #97900 or #98000. Down clips #97800, #98100 or #61200 must be used on all open end installations.

TotalSlide Component Installation:

Use side wall bracket #94700 or #94800; pole clip #95200 or #95100; and shelf stop #96900.

General Specifications:

Furnish and install ClosetMaid Vinyl-Coated, Steel-Rod, Ventilated Shelving and Storage Systems manufactured by ClosetMaid Corp., Ocala, Florida, in all closets.

Wire Shelving Physical Properties:

Materials	Grade c-1006 basic cold drawn steel wire
Tensile strength	Over 100,000 PSI (average)
Cross deck spacing	0.63 in. to 1 in. increments
Coating	Proprietary polyvinyl chloride formula resin (PVC)
Vinyl thickness	9-11 mills (fluidized bed process)
Mounting hardware	Components shall provide for shelving installation to drywall without requiring mounting to concealed wall structural members. Support brackets shall be required for 36 in. span. (24 in. recommended for areas designed for heavy use.)

Coating Specifications:

ClosetMaid heavy duty vinyl coating won't chip or split. It is a proprietary Polyvinyl Chloride Resin (PVC) with an exclusive mixture of ingredients including plasticizers, stabilizers, pigments and other additives—none of which are listed as hazardous materials on OSHA 29CFR1910.1017.

ClosetMaid's patented plastic components are manufactured to get high performance standards and meet rigid material requirements. Nylon is specified for toughness. Hi-impact styrene is specified for rigid strength. Polypropylene is specified for consistent performance. Manufacturer reserves the right to change specifications without notice.

For more information visit www.closetmaidpro.com



13485 Veteran's Way Suite 200
Orlando, FL 32827 Toll - Free #
1-800-221-0641
www.closetmaid.com
© 2019 ClosetMaid LLC
06-11514-00 (05/19)

If a professionally installed ClosetMaid® product does not give the user complete satisfaction when installed in accordance with the manufacturer's instructions, and by an Authorized ClosetMaid Dealer, it will be exchanged free of charge. Please note that only the unsatisfactory part in a multi-piece product will be exchanged.



WIRE SHELVING WITH SUPERSLIDE® ACCESSORIES

GENERAL SPECIFICATIONS

Furnish and install ClosetMaid vinyl-coated, steel-rod, ventilated shelving and storage systems manufactured by ClosetMaid LLC in all closets. Featuring Superslide® accessories that allow hangers to slide without interruption, even around corners.

FIXED MOUNT INSTALLATION INSTRUCTIONS

Shelves are to be attached to walls with ClosetMaid Wall Clips to hold back of shelf (#910 or #911 every 10 in. to 12 in. apart on level line or use templates #99037 or #9038). 1/4 in. holes are to be drilled with a sharp drill bit for all wall attachment hardware. DO NOT PUNCH. Use #8 pin to expand anchor for drywall. Secure wall clip with #8 1 in. screw or pole clip #978 directly to wood with #8 1-1/4 in. screw. For concrete, drill 1/4 in. with masonry bit. Insert Wall clip #910, secure with #8 1 in. screw. All shelves must be front supported a maximum of every 36 in. with appropriate end brackets, support brackets or poles. For open-end installations, install down clips #978, #981, or multi-purpose #612 with #250 anchor, or secure to stud with 1-1/4 in. screws (preferred) on the back rod behind every support bracket. Visit closetmaid.com for complete installation instructions.

ADJUSTABLE INSTALLATION INSTRUCTIONS

Only 12 in., 16 in., and 20 in. shelving can be utilized with the adjustable ShelfTrack® System.

Install Hang Track: At desired height, level Hang Track with overhang positioned at top. Mark hole locations every 16 in. for studs and every 8 in. for concrete or drywall. Secure to wall. **Install Standards:** Locate notched end of Standard. Place Standard onto Hang Track so notch fits over bottom rail. Space Standards no more than 24 in. apart. **Install Brackets:** Insert Brackets into Standards at desired heights. **Install shelving:** Position shelf so Bracket nose fits between wires on front of shelf. Push shelf back and position back wire behind hooks on back of Brackets. Press shelf down to lock into place. **Secure Standards:** Locate and mark hole closest to center point of EACH Standard. Swing Standard to one side (DO NOT PULL STANDARDS AWAY FROM WALL) and drill hole. For concrete and drywall walls, install anchor or toggle. Reposition Standard back over hole and secure to wall.

Attach SuperSlide® closet rod by hooking the j-bracket onto the wire shelf and then snapping the closet rod into the j-bracket. Visit closetmaid.com for complete installation instructions.

CLEANING MAINTENANCE

Clean your ClosetMaid product with a soft cloth and mild soap, rinse thoroughly with warm water, and dry with a clean, soft cloth. Never use cleaners containing abrasives.



- All ClosetMaid wire shelving is SCS certified for a minimum of 91% recycled content.
- All ClosetMaid wire shelving is SCS certified to meet Indoor Air Quality Indoor Advantage Gold requirements and supports safe and healthy indoor environments for school classroom, private office and/or single-family residence per California Specification 01350.
- All ClosetMaid wire shelving is manufactured in the USA.
- If a ClosetMaid product does not give you complete satisfaction when installed in accordance with the manufacturer's instructions, it will be exchanged free of charge. Please note that only the unsatisfactory part in a multi-piece product will be exchanged.

Component	Features
306 12 ft. Linen	6 in. deep
31021 12 ft. Low Profile Linen	9 in. deep
564021 12 ft. Low Profile Linen /Superslide®/All-Purpose	12 in. deep
564221 12 ft. Low Profile Linen /Superslide®/All-Purpose	16 in. deep
32521 12 ft. Low Profile Linen	20 in. deep

WIRE SHELVING PHYSICAL PROPERTIES

Materials: Grade c-1006 basic cold drawn steel wire.
12-3/4 GA and 4-1/2 GA

Tensile strength: Over 100,000 PSI (average)

Cross deck spacing: 1 in. increments, 12-3/4 GA

Finish: White or Satin Chrome

Coating: Proprietary polyvinyl chloride formula resin (PVC)

Vinyl thickness: 9-17 mills (fluidized bed process)

Mounting hardware: Components shall provide for shelving installation to drywall without requiring mounting to concealed wall structural members. Support brackets shall be required for 36 in. span. (24 in. recommended for areas designed for heavy use.) Wall clips are required 1 in. from each end and every 10 in. to 12 in. in between.

SPECIFICATIONS

- Ventilated wire shelving allows for visibility of items
- Weight must be evenly distributed across shelf
- Material: Vinyl coated steel













COATING SPECIFICATIONS

ClosetMaid heavy duty vinyl coating won't chip or split. It is a proprietary Polyvinyl Chloride Resin (PVC) with an exclusive mixture of ingredients including plasticizers, stabilizers, pigments and other additives—none of which are listed as hazardous materials on OSHA 29CFR1910.1017.





ClosetMaid's patented plastic components are manufactured to get high performance standards and meet rigid material requirements. Nylon is specified for toughness. Hi-impact styrene is specified for rigid strength. Polypropylene is specified for consistent performance.

06-11693-00

FIXED MOUNT SHELVING

Component	Material	Finish	Features
Pre-Loaded Wall Clip 	Polypropylene	White	Attaches to the back of Shelving to anchor Shelf to the wall. Use 1 Wall Clip every 12" and 1 at each end. Available for concrete/stud and drywall installations.
Pole Clip 	Polypropylene	White	Attaches to 1/2" Square Poles, 71" & 85" Use in place of support brackets when stacking 2 or more shelves.
Support Bracket 	Industrial Grade Steel	White	Supports front lip of Shelving. Use 1 Shelf Support Bracket every 36" and 1 at each end. Available in 12", 16", and 20" lengths.
		Satin Chrome	
Pre-Loaded Side Wall Bracket 	Polypropylene	White	Supports front lip of shelving where it meets a sidewall.
Pre-Loaded Wall Anchor 	Polypropylene	White	Use to affix support bracket to wall.
		Satin Chrome	
Small & Large End Caps 	Vinyl	White	Use on cut ends of shelving to protect clothing. Available in large (Shelf & Rod) and small (SuperSlide®, Close Mesh, and Shelf & Rod) shelving sizes.
		Satin Chrome	
Pre-Loaded Down Clip 	Polypropylene	White	Attaches to the back of shelving to anchor shelf to wall.
Multi-Purpose Wire Clip 	Industrial Grade Steel	White	Attaches to the back of shelving to secure shelf to the wall. Use 1 Clip every 12" and 1 at each end. Use with or instead of Wall Clips. Use 228 - #8 x 1 1/4" pan head screw for stud installation.
		Satin Chrome	
Corner Support 	Industrial Grade Steel	White	For corner installations. Supports front lip of shelving to keep it level where it meets another shelf in the corner
		Satin Chrome	
1/2" Square Pole 71" & 85" 	Aluminum	White	Use in place of support brackets when stacking 2 or more shelves.
	Steel		
Universal Low Profile Joiner Plate 	Epoxy Coated Steel	White	Use to join two shelves together to create a continuous run of shelving.
Universal Shelf Support 	Polypropylene	White	Attaches to the back of shelving to support shelf at an angle for shoes. Shelf should be installed lip up using wall clips to keep shoes in place.
		Satin Chrome	

ADJUSTABLE SHELVING

Component	Material	Finish	Features
Hang Track 	Industrial Grade Steel	White	Mounts to wall to support entire ShelfTrack® shelving system.
Standard 	Industrial Grade Steel	White	Attaches to hang track to support brackets and shelving.
Bracket 	Industrial Grade Steel	White	Attaches to standards to support shelves and creates an adjustable shelving system. Comes in 9in., 12in., 16in., and 20in. lengths.
Shelf End Cap 	Vinyl	White	Place shelf caps onto exposed shelf wires. End caps are designed to be used with ClosetMaid® Shelf & Rod shelving.

ClosetMaid Adjustable and ShelfTrack® with Superslide® shelf system is manufactured by ClosetMaid LLC., Orlando, Florida. Manufacturer reserves the right to change specifications without notice.



SOLID WOOD SHELVING SYSTEM

DESCRIPTION

ExpressShelf is a design and build, pre-finished shelf and rod system that provides a fast and affordable alternative to traditional, built-in-place painted-MDF plank and pole systems. It can also be configured as a shelf system for other applications such as linen closets and pantries.

With its attractive and intelligent patent-pending hardware, ExpressShelf installs quickly and easily with basic tools and/or a drill template and eliminates the need for ladders, caulking, and painting. ExpressShelf is installed to your specifications by Authorized ClosetMaid installing dealers and backed by the ClosetMaid Free Replacement policy. Complimentary Professional Services such as storage design and order/delivery by project are also available.

SPECIFICATIONS

Furnish and install ClosetMaid ExpressShelf pre-finished solid laminate or melamine shelf, shelf and rod system or ventilated shelving manufactured by ClosetMaid LLC, in all closets, linen, and pantry.

APPLICATIONS

Walk-in, reach-in, coat and linen closets, pantries, and decorative shelving.

KEY COMPONENTS

- Backwall Channel
- Sidewall Bracket
- Shelf
 - 12 in. Laminate
 - 14 in. Melamine
- Universal Pole Cups
- Closet Rods
- Closet Rod End Caps
- Shelf and Rod Support Angle Brackets
- Shelf Support Angle Brackets
- Shelf Trim
- Closet Rod joiner
- Straight H-channel shelf joiner
- Corner H-channel shelf joiner
- Corner Rounder Hang Rod
- Shelf End Caps

MOUNTING

- Wall mounted

FINISHES

- Autumn Brown
- Deep Brunette
- Oxford Black
- White
- Clean Slate
- Timeless Taupe
- Washed White
- Natural Blonde
- Modern Gray

PHOTO INDEX

LEFT: HOSPITALITY HOTEL ROOM / FINISH DEEP BRUNETTE

MIDDLE: WALK-IN PANTRY / FINISH WHITE

RIGHT: REACH-IN CLOSET / FINISH AUTUMN BROWN

INSTALLATION INSTRUCTIONS

You must follow the manufacturer's instructions supplied by ClosetMaid to ensure eligibility for the replacement warranty.

Ventilated wall-to-wall installation instructions

These instructions are for reach-in wall-to-wall closet configurations. These instructions may utilize the following hardware: shelf, backwall channel, sidewall brackets, universal pole cups, shelf and rod angle brackets, closet rods, closet rod end caps and shelf trim.

- Key steps: 1. Measure corner to corner and determine desired height for each shelf. 2. Install the backwall channel. 3. Install sidewall brackets. 4. Measure and cut shelf to size. 5. Install shelf. 6. Attach shelf to hardware. 7. Measure, cut and install closet rods. 8. Install support angel brackets. 9. Install shelf trim.

Please visit [HERE](#) for further installation instructions.

Walk-in installation instructions

These instructions are for walk-in closet configurations including wall-to-open, corners, and corner rounder bars. These instructions may utilize the following hardware: Shelf, backwall channel, sidewall brackets, universal pole cups, shelf and rod angle brackets, closet rode, closet rod end caps, shelf trim, and shelf end caps.

- Key steps: 1. Install backwall channel. 2. Install sidewall bracket and universal pole cups. 3. Install shelves. 4. Install support angle brackets. 5. Install closet rods and additional parts. 6. Install shelf finishes - shelf end caps and shelf trim.

Please visit [HERE](#) for further installation instructions.

Reach-in wall-to-wall installation instructions










These instructions are for reach-in wall-to-wall closet configurations. These instructions may utilize the following hardware: shelf, backwall channel, sidewall brackets, universal pole cups, shelf and rod angle brackets, closet rods, closet rod end caps and shelf trim.









- Key steps: 1. Install backwall channel. 2. Measure and cur shelves to size. 3. Install sidewall brackets. 4. Install universal pole cup. 5. Install the cut shelves. 6. Measure, cut and install closet rod. 7. Install angle support brackets. 8. Install shelf trim.

Please visit [HERE](#) for further installation instructions.


CLEANING, CARE, AND MAINTENANCE

- Using a duster, remove debris from shelf surfaces. You may use mild liquid soap with warm water or a mild household cleaner such as Formula 409® to remove dirt. Use a clean damp cloth to rinse-wipe the surface of the cleaning solution. Dry surface with a clean, soft cloth or paper towel.
- Never use detergents, soap pads, or any cleaners with abrasives. Avoid use of paste wax and polishes that contain silicone. Buildup over time will leave a residue that attracts dust and will be difficult to remove.

Component	Material	Finish	Features
Backwall Channel 	Stamped Metal Epoxy Coated	White	Durable steel, 0.91 in. H x 96 in. W x 1.35 in. L Can be stud or drywall mounted for easy installation Top lip securely holds shelf down; no nailing required
		Black	
Sidewall Bracket 	Stamped Metal Epoxy Coated	White	Durable steel, 0.85 in. H x 1.35 in. W x 11.74 in. L Nests in the backwall channel for easy leveling
		Black	
Universal Pole Cup 	Cast Metal Epoxy Coated or Chrome Plated	White	Durable cast metal part, 3.83 in. H x 1.50 in. D x 2 in. L T-interface engages the sidewall bracket for quick positioning and fastening without measuring
		Chrome	
Shelf 	Laminate	12 in. White	Laminate shelf: 0.75 in. H x 11.67 in. D x 96 in. L
	Melamine	14 in. White	Melamine shelf: 0.75 in. H x 14 in. D x 96 in. L, industrial grade particle wood, 45 lbs. density per cubic foot. Thermal-fused melamine with 110-gram paper, 1 mm PVC edge banding.
		14 in. Deep Brunette	
		14 in. Timeless Taupe	
		14 in. Modern Gray	
		14 in. Oxford Black	
		14 in. Natural Blonde	
		14 in. Washed White	
		14 in. Clean Slate	
		14 in. Autumn Brown	
Shelf Trim - Left & Right 	ABS Plastic	12 in. White	12 in. Shelf Trim: 1.23 in. H x 1.0 in. W x 11.25 in. L 14 in. Shelf Trim: 1.23 in. H x 1.0 in. W x 13.57 in. L Easily installs with hidden hardware on the shelf by wall edges Provides 1/2 in. forgiveness if the shelf is cut imperfectly Provides a finished aesthetic Eliminates caulking and painting
		12 in. Chrome	
		14 in. White	
		14 in. Chrome	
Shelf and Rod Support Angle Bracket 	Industrial Grade Steel, Polypropylene	White	7.43 in. H x 11.5 in. D x 1.84 in. L Supports either a 12 in. or 14 in. shelf Sleek profile maximizes space between shelves, minimizes obstruction Hook supports a 1 in. OD closet rod and provides continuous slide of hangers Installs to the shelf with wood screws. Installs to the wall with drywall easy anchors and screws; or screws directly to studs without the requirement of cleats.
		Chrome	
Shelf Support Angle Bracket 	Industrial Grade Steel	White	
		Chrome	
Closet Rod 	Industrial Grade Steel	White	
		Chrome	
Closet Rod End Cap 	Diecast Zinc	White	1.75 in. H x 1.75 in. D x 1.30 in. L Caps off an open end of the closet rod in a wall-to-open design
		Chrome	

Component	Material	Finish	Features
Closet Rod Joiner 	Polypropylene	Clear	1.07 in. H x 2.64 in. W x 0.54 in. L Clear component easily and securely joins two cut pieces of 1 in. OD closet rods for extended lengths
Straight H-Channel 	ABS Plastic	12 in. White	12 in. Straight H-Channels: 1.0 in. H x 1.62 in. W x 11.08 in. L 14 in. Straight H-Channels: 1.0 in. H x 1.62 in. W x 13.41 in. L Joins two cut shelves in-line to create a longer shelf run Color-matched, slim profile subtly smooths and conceals the seams between shelves
		14 in. White	
		14 in. Clear	
Corner H-Channels 	ABS Plastic	12 in. White	12 in. Corner H-Channels: 1.0 in. H x 1.62 in. W x 11.08 in. L 14 in. Corner H-Channels: 1.0 in. H x 1.62 in. W x 13.41 in. L Joins two cut shelves at right angles for corners Color-matched, slim profile subtly smooths and conceals the seams between shelves
		14 in. White	
		14 in. Clear	
Shelf End Cap 	ABS Plastic	12 in. White	12 in. Shelf End Cap: 1.0 in. H x 0.87 in. W x 11.82 in. L 14 in. Shelf End Cap: 1.0 in. H x 0.87 in. W x 14.16 in. L Finishes a cut and open edge of a shelf Easily slides and fastens to the shelf Recommend positioning the support brackets at least 2 in. from an open edge with shelf end caps
		12 in. Chrome	
		14 in. White	
		14 in. Chrome	
Corner Rounder Hanger Bar 	Industrial Grade Steel	White	1.0 in. H x 12.0 in. W x 12.0 in. L Connects to two 1 in. OD closet rods at corners for improved corner space utilization Enables continuous slide of hangers at corners Requires two Shelf and Rod Support Angle Brackets fastened at 21 in. from each corner wall
		Chrome	
Straight Shelf Joiner Plate 	ABS Plastic	White	Joins two open ends of shelving on a straight or corner installation Easy alignment accessory 1.50"W x 1.68"D x 1.83"H
Corner Shelf Joiner Plate 	ABS Plastic	White	Joins two open ends of shelving on a straight or corner installation Easy alignment accessory 3.15"W x 3.15"D x 1.88"H
Wood Shelf Trim 	ABS Plastic	12 in. White	Easily installs with hidden hardware on the shelf by wall edges Provides 1/2 in. forgiveness if the shelf is cut imperfectly Provides a finished aesthetic Eliminates caulking and painting
		12 in. Chrome	
		14 in. White	
		14 in. Chrome	

AVAILABLE FINISHES



White



Deep Brunette



Timeless Taupe



Modern Gray



Oxford Black



Natural Blonde



Washed White



Clean Slate



Autumn Brown

ClosetMaid ShelfTrack ExpressShelf shelf system is manufactured by ClosetMaid LLC., Orlando, Florida. Manufacturer reserves the right to change specifications without notice.



ABOUT

Manufactured from a combination of robust, industrial grade particle board with a highly durable melamine finish and real wood drawer boxes, MasterSuite® is built for lasting luxury. The system provides almost limitless configurations of shelves, cabinets, drawers, hang rods and more, accommodating any functional requirement in virtually any space.

Plus, MasterSuite® offers a host of attractive design options and convenient accessories to meet the needs of almost any residential or commercial application where maximizing storage space is desired.

PHOTO INDEX

TOP LEFT: MASTERSUITE® CLASSIC IN NATURAL BLONDE AND 27TH AVE IN CLEAN SLATE

TOP RIGHT: MASTERSUITE® 27TH AVE IN TIMELESS TAUPE

MIDDLE RIGHT: MASTERSUITE® CLASSIC IN WHITE

BOTTOM LEFT: MASTERSUITE® CLASSIC IN WHITE

BOTTOM MIDDLE: MASTERSUITE® CLASSIC IN COASTAL GRAY

BOTTOM RIGHT: MASTERSUITE® 27TH AVE IN OXFORD BLACK

SPECIFICATIONS

- 3/4 in. industrial grade particle wood, 45 lbs. density/cubic ft.
- Thermal fused melamine with 110-gram paper
- 1 mm PVC edge banding
- Thermal foil doors and drawers (kitchen cabinet quality)
- Real wood drawer boxes in select finishes
- System uses system 32-hole pattern (32 mm between holes) 5 mm hole diameter. Holes are used for connecting components, hardware and accessories
- High industry ratings for tolerance, tensile strength, screw-holding capabilities and internal bonding
- 14 in. deep system – All finishes
- 24 in. deep system – MasterSuite® Classic - White only, 27th Avenue - All finishes
- Available in floor mount or wall mount designs



If a ClosetMaid product does not give you complete satisfaction when installed in accordance with the manufacturer's instructions, it will be exchanged free of charge. Please note that only the unsatisfactory part in a multi-piece product will be exchanged.

06-14117-00

INSTALLATION INSTRUCTIONS

Please visit [HERE](#) for installation instructions.

DRAWER BOXES

- Height: 6 in., 10 in. | Width: 18 in., 24 in., 30 in. | Depth: 14 in., 18 in.
- Solid wood option: 5/8 in. (16 mm) thick sides, 3/8 in. (9 mm) birch veneer bottom, soft-closing full-extension glides
- Thermal foil MDF option: White, full-extension glides

DRAWER FRONT SPECS































- Traditional Raised Panel, Shaker, and Modern in matched thermal foil wrapped MDF
- Pre-marked for knob, 96 mm and 128 mm handles

SHELVES

- Thickness: 3/4 in. (19 mm)
- Edge banding: 0.4 in. (1mm)
- Thermal Fused Melamine, HPL
- Available as fixed cam or adjustable
- Depth: 14 in., 24 in. | Width: 18 in., 24 in., 30 in., 96 in.

HANG ROD

- 1 in. (25 mm) diameter, 20 ga tubular steel
- Chrome, oil-rubbed bronze, or white (Epoxy) finish

		Modern	Traditional Raised	Traditional 5 Panel	Shaker	Shaker 5 Panel
CLASSIC COLLECTION	White					
	Natural Blonde					
	Autumn Brown					
	Deep Brunette					
27 TH AVENUE	Washed White					
	Modern Gray					
	Timeless Taupe					
	Clean Slate					
	Oxford Black					
	Deep Blue*					

* Accent color for fronts & backing only.

PARTITIONS



14 in. Depths

LENGTHS

- Upright Panel: 85 5/8 in., 95 3/4 in. length
- Hanging Panel: 24 in., 48 in., 60 in., 80 in.



Hutch

LENGTHS

- Upright Panel: 85 5/8 in., 95 3/4 in. length
- 20 in. deep on bottom half of panel



24 in. Depths

LENGTHS

- Upright Panel: 36 in., 85 5/8 in., 95 3/4 in.

PARTITION PHYSICAL PROPERTIES

Materials: Thermal Fused Melamine, HPL

Thickness: 3/4 in. (19 mm)

Edge Banding: 0.4 in. (1mm)


MASTERSUITE ACCESSORIES



Hutch




Crown molding;
shaker & traditional




Corner shelf



Solid wood drawers




Bench



Pull out fronts




Tie rack



Belt rack




Valet rod



Corner hang rod




Hamper




Deep drawer




Shoe fence



Hang rod



Pants Organizer



Jewelry tray



Wire drawer



Laundry organizer



Assorted handles
& knobs



Island



Hooks & mounts



Sliding Mirror



Island top finish
Black Alicante



Island top finish
Calcutta Marble

ClosetMaid MasterSuite® shelf system is manufactured by ClosetMaid LLC., Orlando, Florida. Manufacturer reserves the right to change specifications without notice.

WIRE SHELVING WITH INTEGRATED HANG ROD SYSTEM

GENERAL SPECIFICATIONS

Furnish and install ClosetMaid vinyl-coated, steel-rod, ventilated shelving and storage systems manufactured by ClosetMaid LLC in all closets.

FIXED MOUNT INSTALLATION INSTRUCTIONS

Shelves are to be attached to walls with ClosetMaid Wall Clips to hold back of shelf (#910 or #911 every 10 in. to 12 in. apart on level line or use templates #99037 or #9038). 1/4 in. holes are to be drilled with a sharp drill bit for all wall attachment hardware. DO NOT PUNCH. Use #8 pin to expand anchor for drywall. Secure wall clip with #8 1 in. screw or pole clip #978 directly to wood with #8 1-1/4 in. screw. For concrete, drill 1/4 in. with masonry bit. Insert Wall clip #910, secure with #8 1 in. screw. All shelves must be front supported a maximum of every 36 in. with appropriate end brackets, support brackets or poles. For open-end installations, install down clips #978, #981, or multi-purpose #612 with #250 anchor, or secure to stud with 1-1/4 in. screws (preferred) on the back rod behind every support bracket. Visit closetmaid.com for complete installation instructions.

ADJUSTABLE INSTALLATION INSTRUCTIONS

Only 12 in., 16 in., and 20 in. shelving can be utilized with the adjustable ShelfTrack® System.

Install Hang Track: At desired height, level Hang Track with overhang positioned at top. Mark hole locations every 16 in. for studs and every 8 in. for concrete or drywall. Secure to wall. **Install Standards:** Locate notched end of Standard. Place Standard onto Hang Track so notch fits over bottom rail. Space Standards no more than 24 in. apart. **Install Brackets:** Insert Brackets into Standards at desired heights. **Install shelving:** Position shelf so Bracket nose fits between wires on front of shelf. Push shelf back and position back wire behind hooks on back of Brackets. Press shelf down to lock into place. **Secure Standards:** Locate and mark hole closest to center point of EACH Standard. Swing Standard to one side (DO NOT PULL STANDARDS AWAY FROM WALL.) and drill hole. For concrete and drywall walls, install anchor or toggle. Reposition Standard back over hole and secure to wall.

CLEANING MAINTENANCE

Clean your ClosetMaid product with a soft cloth and mild soap, rinse thoroughly with warm water, and dry with a clean, soft cloth. Never use cleaners containing abrasives.



- All ClosetMaid wire shelving is SCS certified for a minimum of 91% recycled content.
- All ClosetMaid wire shelving is SCS certified to meet Indoor Air Quality Indoor Advantage Gold requirements and supports safe and healthy indoor environments for school classroom, private office and/or single-family residence per California Specification 01350.
- All ClosetMaid wire shelving is manufactured in the USA.
- If a ClosetMaid product does not give you complete satisfaction when installed in accordance with the manufacturer's instructions, it will be exchanged free of charge. Please note that only the unsatisfactory part in a multi-piece product will be exchanged.



Component	Features
316 12 ft. Shelf & Rod	10 in. deep
300 12 ft. Shelf & Rod	12 in. deep
305 12 ft. Shelf & Rod	16 in. deep
304 12 ft. Shelf & Rod	16 in. deep with 10 in. Hang

WIRE SHELVING PHYSICAL PROPERTIES

Materials: Grade c-1006 basic cold drawn steel wire.
12-3/4 GA, 4-1/2 GA, and 1 GA

Tensile strength: Over 100,000 PSI (average)

Cross deck spacing: 1 in. increments, 12-3/4 GA

Coating: Proprietary polyvinyl chloride formula resin (PVC)

Vinyl thickness: 9-17 mills (fluidized bed process)

Mounting hardware: Components shall provide for shelving installation to drywall without requiring mounting to concealed wall structural members. Support brackets shall be required for 36 in. span. (24 in. recommended for areas designed for heavy use.) Wall clips are required 1 in. from each end and every 10 in. to 12 in. in between.

SPECIFICATIONS












- Ventilated wire shelving allows for visibility of items
- Weight must be evenly distributed across shelf
- Material: Vinyl coated steel

COATING SPECIFICATIONS





ClosetMaid heavy duty vinyl coating won't chip or split. It is a proprietary Polyvinyl Chloride Resin (PVC) with an exclusive mixture of ingredients including plasticizers, stabilizers, pigments and other additives—none of which are listed as hazardous materials on OSHA 29CFR1910.1017.

ClosetMaid's patented plastic components are manufactured to get high performance standards and meet rigid material requirements. Nylon is specified for toughness. Hi-impact styrene is specified for rigid strength. Polypropylene is specified for consistent performance.

FIXED MOUNT SHELVING

Component	Material	Finish	Features
Corner Shelf 	Industrial Grade Steel	White	Connects two shelves to be a continuous shelf system.
Preloaded Side Wall Bracket 	Polypropylene	White	Supports front lip of shelving where it meets a sidewall.
Shelf End Cap 	ABS Plastic	White	Use on cut ends of shelving to protect clothing.
Pre-Loaded Wall Clip 	Polypropylene	White	Attaches to the back of Shelving to anchor Shelf to the wall. Use 1 Wall Clip every 12" and 1 at each end. Available for concrete/stud and drywall installations.
Pole Clip 	Polypropylene	White	Attaches to 1/2" Square Poles, 71" & 85" Use in place of support brackets when stacking 2 or more shelves.
Support Bracket 	Industrial Grade Steel	White	Supports front lip of Shelving. Use 1 Shelf Support Bracket every 36" and 1 at each end. Available in 12", 16", and 20" lengths.
Universal Low Profile Joiner Plate 	Polypropylene	White	Use to join two shelves together to create a continuous run of shelving.
Pre-Loaded Wall Anchor 	Polypropylene	White	Use to affix support bracket to wall.
Pre-Loaded Down Clip 	Polypropylene	White	Attaches to the back of shelving to anchor shelf to wall.
Multi-Purpose Wire Clip 	Industrial Grade Steel	White	Attaches to the back of shelving to secure shelf to the wall. Use 1 Clip every 12" and 1 at each end. Use with or instead of Wall Clips. Use 228 - #8 x 1 1/4" pan head screw for stud installation.
Internal Pole Clip 	Epoxy Coated Steel	White	Attaches to pole to support shelving in a center stack.

ADJUSTABLE SHELVING

Component	Material	Finish	Features
<div>Hang Track</div> 	Industrial Grade Steel	White	Mounts to wall to support entire ShelfTrack® shelving system.
		Satin Chrome	
<div>Standard</div> 	Industrial Grade Steel	White	Attaches to hang track to support brackets and shelving.
		Satin Chrome	
<div>Bracket</div> 	Industrial Grade Steel	White	Attaches to standards to support shelves and creates an adjustable shelving system. Comes in 12in., 16in., and 20in. lengths
		Satin Chrome	
<div>Shelf End Cap</div> 	Vinyl	White	Place shelf caps onto exposed shelf wires. End caps are designed to be used with ClosetMaid® Shelf & Rod shelving.
		Satin Chrome	



PREMIUM ADJUSTABLE CLOSET & STORAGE SYSTEM

GENERAL SPECIFICATIONS

ShelfTrack EVO gives professionals in the industry a fast, easy-to-install solution that provides the style and flexibility today's homeowners crave at a mid-level price point.

COATING SPECIFICATIONS

ClosetMaid spec# 080-000-000 heavy duty epoxy coating on vertical standards – brackets won't chip or split. Our patented plastic components are manufactured to achieve high performance standards and meet rigid material requirements. Nylon is specified for toughness. Hi-impact styrene is specified for rigid strength. Polypropylene is specified for consistent performance.

CLEANING MAINTENANCE

Use a duster to remove debris from shelf surfaces. You may use mild liquid soap with warm water to remove dirt. Use a clean, damp cloth to rinse-wipe the surface of the cleaning solution. Dry surface with a clean, soft cloth or paper towel.

Never use detergents, soap pads, or any cleaners with abrasives. Avoid use of paste wax and polishes that contain silicone. The buildup over time will leave a residue that attracts dust and will be difficult to remove.

WOOD DRAWERS AND SHELVES SPECIFICATIONS

5/8 Commercial grade spec# 123-000-604 is an MS-ANSI 208.1 grade industrial particle board. The melamine boards are 16mm thick and the edge band thickness per specification 130-502-000 is 0.47±0.05mm.

INSTALLATION INSTRUCTIONS

Hang Track: Locate studs and secure hang track using a #12 by 2 in. screw per stud. Use a 3/16 in. toggle bolt into drywall every 8 in. where stud mount is not possible. Place vertical standards on hang track, making sure first and last vertical standards are at least 2 in. from end of hang track. Add ShelfTrack brackets spaced no more than 36 in. apart.

Shelf: Rest shelving on top of shelf brackets. Unsupported overhang should not exceed 6 in. Drill pre-inserted screws into bottom of shelf at all locations. For brackets at the end of a shelf, insert screw sleeve and attach to shelf using a #10 by 3 in. screw. If shelf is cut, cover exposed edge with either edge band strip or shelf cap. **Hang Rod:** Slide front attachment of hang rod bracket into front two slots of shelf bracket, lift back attachment into back two slots, and pull hang rod bracket directly back to lock into place. Push end caps into open sides of hang rod and snap rod into pole cups on bracket. **Drawer:** Vertical standards must be exactly 23 in. apart. Lift drawer box into position, align brackets into inside slots, and lower drawer into place. If drawer is not level with adjacent shelving, adjust using leveling screws.













Shoe Shelf: Place brackets on vertical standards. Expose adhesive strips on brackets, place shoe shelf, and secure shelf using provided shoe shelf screws. **Standards:** Secure standards to drywall by drilling a 1/2 in. hole, placing a 3/16 in. toggle through wall, and tightening bolt through vertical standard.





You must follow the manufacturer's instructions supplied by ClosetMaid to ensure eligibility for the replacement warranty.









Visit closetmaidpro.com for complete installation instructions.



If a ClosetMaid product does not give you complete satisfaction when installed in accordance with the manufacturer's instructions, it will be exchanged free of charge. Please note that only the unsatisfactory part in a multi-piece product will be exchanged.

Component	Material	Finish	Features
Hang Track 	Epoxy Coated Steel	White, Bronze	Hot-rolled sheet metal, Grade C-1010 24, 30, 36, 48, 60, 72, or 96 in. L
Hang Track Cover 	PVC	White, Bronze	Snaps onto hangtrack to create a finished look. 24, 30, 36, 48, 60, 72, or 96 in. L
Standard 	Epoxy Coated Steel	White, Bronze	Slide together to quickly align brackets for fast installation. 12, 24, 30, 48, 60, 72, or 84 in. L
Shelf Bracket 	Epoxy Coated Steel	White, Bronze	Attaches to standards to support shelves and creates an adjustable shelving system. Comes in 10.5, 12.5, or 14.5 in. L Available with or without hang rod slots.
Bracket Insert with Screw 	Polypropylene	White, Bronze	Use to affix shelf to shelf bracket.
Shelf 	Melamine	White, Frosted Birch, Golden Oak, Mountain Ash	12, 14, or 16 in. D x 24, 30, 36, 48, 60, 72, or 96 in. L 5/8" Industrial Grade Particle Board
Hang Rod Bracket with Polecup 	Epoxy Coated Steel / ABS Plastic	White, Bronze	Pole cup comes pre-attached, accommodates 1 in. diameter rod. Hang rods snap firmly in place.
Hang Rod 	Industrial Grade Steel	White, Oil Rubbed Bronze, Chrome	Snaps into hang rod bracket with polecup to allow hangers to slide without interruption. 24, 30, 36, 47, 60, 70 or 93 in. L
Hang Rod Endcap 	Diecast Zinc	White, Oil Rubbed Bronze, Chrome	Caps off an open end of the closet rod. Accommodates 1 in. diameter rods
Single Drawer (Traditional) 	Melamine	White, Frosted Birch, Golden Oak, Mountain Ash	14 in. D x 23 in. L 5/8" Industrial Grade Particle Board Includes drawer box leveling bracket with screw.
Single Drawer (Modern) 	Melamine	White, Frosted Birch, Golden Oak, Mountain Ash	14 in. D x 23 in. L 5/8" Industrial Grade Particle Board Includes drawer box leveling bracket with screw.
Double Drawer (Traditional) 	Melamine	White, Frosted Birch, Golden Oak, Mountain Ash	14 in. D x 23 in. L 5/8" Industrial Grade Particle Board Includes drawer box leveling bracket with screw.

Component	Material	Finish	Features
Double Drawer (Modern) 	Melamine	White, Frosted Birch, Golden Oak, Mountain Ash	14 in. D x 23 in. L 5/8" Industrial Grade Particle Board Includes drawer box leveling bracket with screw.
Shoe Shelf 	Melamine	White, Frosted Birch, Golden Oak, Mountain Ash	24, 30, 36, 48, or 72 in. L 5/8" Industrial Grade Particle Board
Edgeband Strip 	Melamine	White, Frosted Birch, Golden Oak, Mountain Ash	Attaches to raw edge of shelf to create a finished edge. Comes in 12, 14, or 16 in. L
Standard Wall Attachment Bracket 	Epoxy Coated Steel	White, Bronze	Used to secure standard to a wall stud when the standard is not in line with the stud.

		Modern	Traditional 5 Panel
DRAWER FINISHES	White		
	Frosted Birch		
	Golden Oak		
	Mountain Ash		

HARDWARE FINISHES

Finshes are available for Handles, Shoe Fences, Hanging Rods & Shelf Brackets



Chrome



Bronze



LIFETIME SHELVING WARRANTY

Manufacturer warrants to the original purchaser of properly installed Organized Living Lifetime wire shelving, that it will remain free of any defects in material and workmanship for as long as the original purchaser owns the product. The word "defects", as used in this warranty, is defined as imperfections which impair the utility of the product. This warranty applies only to properly installed Organized Living Lifetime Ventilated Shelving used for domestic and consumer purposes. In the case of installation of Lifetime Ventilated Shelving used for industrial, commercial or business purposes, these same products are warranted to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase.



Some states, provinces and nations do not allow the exclusion or limitation of implied warranties, or of incidental or consequential damages so the above limitations or exclusions may not apply in every case. This warranty gives the owner specific legal rights, and the owner may also have other rights which may vary from state to state, province to province, and nation to nation.

WARRANTY INSTRUCTIONS

In the event of a warranty claim, send a written notice of any defect occurring within the warranty period to Organized Living, 3100 E. Kemper Rd., Cincinnati, Ohio 45241 or e-mail it to customerservice@organizedliving.com.

The written notice must include:

- A. Name(s) and address(s) of the owner and installer.
- B. A detailed description of the defect.
- C. A photograph of the defect.
- D. Proof of purchase.

If Organized Living determines that the part is defective within the terms of the warranty, Organized Living will repair or furnish a replacement part at no cost.

Maintenance and Cleaning: Organized Living Lifetime Ventilated Shelving is coated with a durable epoxy powder coating that requires no regular maintenance. The shelving may be cleaned with a dusting cloth or with a non-abrasive, mild household cleaner.

Revised 10/05/2017

SHELFTECH SHELVING WARRANTY

Manufacturer warrants to the original purchaser of properly installed Organized Living products, that its products will remain free of any defects in material and workmanship for a period of ten (10) years from the date of purchase. The word "defects", as used in this warranty, is defined as imperfections which impair the utility of the product. This warranty applies only to properly installed Organized Living products used for domestic and consumer purposes. In the case of installation of Organized Living products used for industrial, commercial or business purposes, these same products are warranted to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase.

Some states, provinces and nations do not allow the exclusion or limitation of implied warranties, or of incidental or consequential damages so the above limitations or exclusions may not apply in every case. This warranty gives the owner specific legal rights, and the owner may also have other rights which may vary from state to state, province to province, and nation to nation.

WARRANTY INSTRUCTIONS

In the event of a warranty claim, send a written notice of any defect occurring within the warranty period to Organized Living, 3100 E. Kemper Rd., Cincinnati, Ohio 45241 or e-mail it to customerservice@organizedliving.com.

The written notice must include:

- A. Name(s) and address(s) of the owner and installer.
- B. A detailed description of the defect.
- C. A photograph of the defect.
- D. Proof of purchase.

If Organized Living determines that the part is defective within the terms of the warranty, Organized Living will repair or furnish a replacement part at no cost.

Maintenance and Cleaning: Organized Living Lifetime Ventilated Shelving is coated with a durable epoxy powder coating that requires no regular maintenance. The shelving may be cleaned with a dusting cloth or with a non-abrasive, mild household cleaner.

Revised 10/05/2017



CLASSICA™, FREEDOMRAIL®, SELECT®, AND VUE® PRODUCT WARRANTY

Organized Living warrants to the original purchaser of properly installed Organized Living products, that its products will remain free of any defects in material and workmanship for a period of ten (10) years from the date of purchase. The word "defects", as used in this warranty, is defined as imperfections which impair the utility of the product. This warranty applies only to properly installed Organized Living products used for domestic and consumer purposes.

In the case of installation of Organized Living products used for industrial, commercial or business purposes, these same products are warranted to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase.

THIS WARRANTY EXCLUDES PRODUCT DAMAGE DUE TO IMPROPER INSTALLATION (INCLUDING USE OF UNAUTHORIZED PARTS) OR PRODUCT ABUSE OR MISUSE, WHETHER INFLICTED BY INSTALLING CONTRACTOR, SERVICE COMPANY, OR OTHERS. ORGANIZED LIVING WILL NOT BE RESPONSIBLE FOR LABOR, INSTALLATION OR FREIGHT CHARGES AND/OR ANY DAMAGE INCURRED IN INSTALLATION, REPAIR OR REPLACEMENT, NOR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. NO IMPLIED WARRANTY SHALL EXCEED IN LENGTH THE SPECIFIC WARRANTY GIVEN.

Some states, provinces and nations do not allow the exclusion or limitation of implied warranties, or of incidental or consequential damages so the above limitations or exclusions may not apply in every case. This warranty gives the owner specific legal rights, and the owner may also have other rights which may vary from state to state, province to province, and nation to nation.

WARRANTY INSTRUCTIONS

In the event of a warranty claim, send a written notice of any defect occurring within the warranty period to Organized Living, 3100 E. Kemper Rd., Cincinnati, Ohio 45241 or e-mail it to customerservice@organizedliving.com.

The written notice must include:

- A. Name(s) and address(s) of the owner and installer.
- B. A detailed description of the defect.
- C. A photograph of the defect.
- D. Proof of purchase.

If Organized Living determines that the part is defective within the terms of the warranty, Organized Living will repair or furnish a replacement part at no cost.

Maintenance and Cleaning: Organized Living Lifetime Ventilated Shelving is coated with a durable epoxy powder coating that requires no regular maintenance. The shelving may be cleaned with a dusting cloth or with a non-abrasive, mild household cleaner.

Revised 08/23/2022



Exceptional construction and enduring style are the hallmarks of **Classica**, the traditional collection from Organized Living. Beautifully crafted with $\frac{3}{4}$ " laminate and two mil radius edgebanding, Classica organizes and complements a range of storage spaces, particularly the master suite. Multiple styles of door and drawer fronts can add personalized appeal.

The unique cleat mounting system combines superior strength with ease of installation. Defined by fine craftsmanship, engineering expertise, and simplified installation, Classica sets the standard for beauty and durability.

Why specify Classica?

- 14", 19" and 24" depths available for design flexibility.
- Offer a broad range of design options for both floor and wall mount.
- Available in colors and styles to meet today's furniture trends.
- Manufactured with furniture grade laminate and full extension drawer glides.
- No VOCs and the board is CARB compliant.
- Proudly made in USA.
- Efficient storage maximizes smaller floorplans.
- No blocking needed.
- Can contribute up to six LEED points.




HIGH QUALITY DETAILS

- Mechanical properties are results conducted in accordance with ASTM D 1037-06a "Standard test methods for evaluating the Properties of Wood-based Fiber and Particle Board Materials."
- All board and finish are classified "Furniture Grade."
- Density Range (pcf): 47-50.
- Screw-holding (lbs): 225 face and 180 edge.
- Flame Spread Rating: Class III or C.

CERTIFICATIONS

- California ARB approved TPC-1 to comply with CCR 93120.2 (CARB Composite Wood ATCM).
- Formaldehyde emission requirements for particle board ANSI A208.1-2009.
- ECC Sustainability Standard CPA 4-11, fiber sourcing and manufacturing process.
- 100% Recycled/Recovered Fiber content.
- FSC-Forest Stewardship Council Certification (SCS-COC-00300).

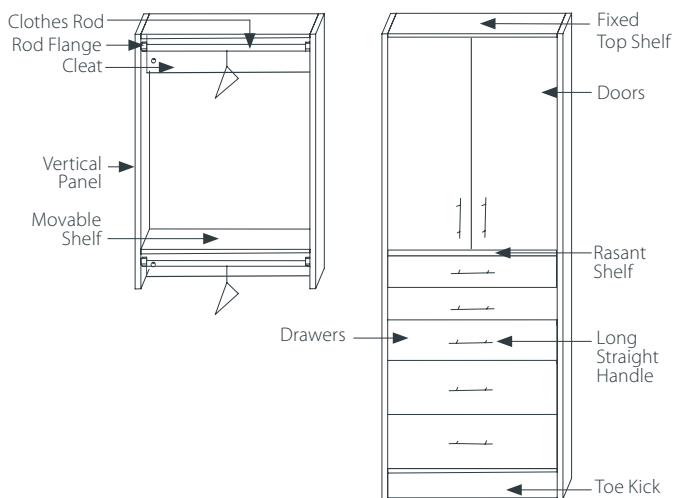

CLASSICA QUICK SPECIFICATIONS

APPLICATIONS: Walk-in closet, reach-in closet, secondary bedroom closet, linen closet, coat closet, pantry, open wall shelving, laundry room, mudroom, entertainment center.

MOUNTING: Floor mount, wall mount.


SPECIFICATIONS: Procure and install Organized Living Classica cleat mounted built-in custom storage system in all closets and storage spaces featuring ¾" furniture grade laminate, full extension drawer glides and adjustable shelves. Manufactured by Organized Living, Cincinnati, Ohio, 513-277-3700.

STATIC LOAD: 75 lb/ft shelf maximum.

Classica is available in these on trend finishes.



White



Century Gray



Bisque



Modern Cherry



Chocolate Pear



Midnight Live*



Driftwood Live*



Cypress Live*



Snowdrift Live*



Gray/Granite (Garage)

*Touchable Texture

3 PART SPECIFICATION HIGHLIGHTS

PART 1 GENERAL Quality Assurance

A. Manufacturer Qualifications: With more than 100 years of engineering and manufacturing excellence, Organized Living delivers the strongest home storage and organization solutions for every area of the home.

B. Installer Qualifications: Factory trained and product experienced.

C. Provide Computer Generated 3-Dimensional drawings for each design variation.

D. Mock-Up: Provide a mock-up for evaluation of surface preparation techniques and application workmanship.

1. Finish areas designated by Architect.
2. Do not proceed with remaining work until workmanship, color, and product selection are approved by Architect.
3. Refinish mock-up area as required to produce acceptable work.

Warranty

Manufacturer warrants to the original purchaser of properly installed Organized Living products, that its products will remain free of any defects in material and workmanship for a period of ten (10) years from the date of purchase. The word "defects", as used in this warranty, is defined as imperfections which impair the utility of the product. This warranty applies only to properly installed Organized Living products used for domestic and

consumer purposes. In the case of installation of Organized Living products used for industrial, commercial or business purposes, these same products are warranted to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase.

PART 2 PRODUCTS Manufacturers

A. Acceptable Manufacturer: Organized Living;
3100 E Kemper Rd, Cincinnati, OH 45241.
Tel: (800) 669-3225 Tel: (513) 277-3700

Fax: (513) 277-3701

Email: customer.service@organizedliving.com

www.organizedliving.com

B. Substitutions: Not permitted due to Organized Living higher quality engineering specifications.

Closet Systems – Classica

A. Products: Classica built-in wood closet systems as manufactured by Organized Living; including components and accessories as required for complete installation.

B. Structural Performance:

1. 45 lb, furniture grade laminate coated particleboard drawers, cabinets. Edgebanding as scheduled, indicated on drawings and required for complete installation. Doweled and screwed joints.
2. Cleats Mounted to wall in Floor and Wall Mounted Cabinets, one at the top and one at the bottom.
 - a. Top Cleat is mounted to wall with one hollow wall anchor in each corner and one screw into stud.

b. Bottom cleat is mounted to wall with one hollow wall anchor in each corner for cabinet stability.

c. Drawer Cleat is mounted behind the bottom drawer, on wall mounted cabinets only, to wall with one hollow wall anchor in each corner and one screw into stud.

3. Full extension soft close drawer guides.

4. 3-way adjustable, soft close, concealed hinges.

5. Knobs, pulls and handles in chrome, nickel and black as scheduled, indicated on Drawings and required for complete installation.

6. Accessories: Hooks, Tie/Belt Rack, Next Day Rod, as scheduled, indicated on drawings and required for complete installation.

PART 3 EXECUTION Installation

A. Can be installed in any substrate in accordance with manufacturer's instructions.

B. Install components true to line, square with adjacent components with drawer glides and working hardware operating smoothly without binding, or gaps when closed.

Maintenance and Cleaning

Organized Living Classica is constructed of furniture grade laminate that requires no regular maintenance. If required, the shelving may be cleaned with a dry dusting rag or if a stronger cleaning is required, the shelving may be cleaned with any non-abrasive household cleaner and water.

Visit OrganizedLiving.com to download the full 3-Part Specifications and to get closet design ideas. Call us at 513-277-3700. We can create custom designs for your projects that convert to shop drawings.



Differentiate your projects with Organized Living **freedomRail**, the only truly adjustable system. It offers the flexibility and ease to adjust components at any time, without tools. freedomRail is made with the highest steel gauge, so you can specify freedomRail confidently knowing the quality and total adjustability will last a lifetime.

Why specify freedomRail?

- Engineered for fast installation.
- Installs 100% after-paint so it won't slow down a project.
- Available in nine, on-trend finishes matching any décor.
- Manufactured with furniture grade laminate and the highest steel gauge with epoxy powder coating.
- Patented Rail holds up to 170 lbs per linear foot, no blocking needed, stud installation guaranteed.
- No harmful VOCs or PVC and its CARB compliant.
- Proudly made in the USA.
- Efficient storage maximizes smaller floorplans.
- ADA compliant.
- Can contribute up to six LEED points.



Get started today! Visit [OrganizedLiving.com](https://www.OrganizedLiving.com) now.

freedomRail is the most innovative concept in home storage and organization. It provides all the benefits of a custom closet while being quick to install, easy to adjust and easy to upgrade.

Quick to Install.

freedomRail is production-oriented so installers can finish projects fast, saving time and money.

Easy to Adjust.

All components are designed for a lifetime of use. Reposition shelves to fit a growing child or move pantry shelves to accommodate bulky appliances without tools.

Easy to Upgrade.

Place a Rail in every closet of your project and then choose from a variety of options to customize that storage space. Shelving can be ventilated or solid. Add accessories to create a custom closet feel.

freedomRail

is available in these on-trend finishes.



White



Century Gray



Modern Cherry



Chocolate Pear



Midnight Live*



Driftwood Live*



Cypress Live*



Snowdrift Live*



Gray/Granite (Garage)

*Touchable Texture


FREEDOMRAIL QUICK SPECIFICATIONS

APPLICATIONS: Walk-in closet, reach-in closet, secondary bedroom closet, linen closet, coat closet, pantry, open wall shelving, laundry room, mudroom, office, entertainment center, storage room, garage.

MOUNTING: Wall mount.

SPECIFICATIONS: Procure and install freedomRail rail-based, adjustable closet shelving system, in all closets and storage spaces. Provide with 1" diameter chrome clothes rod for hanging areas. Manufactured by Organized Living, Cincinnati, Ohio, 513-277-3700.

STATIC LOAD: 170 lb/ft shelf maximum.

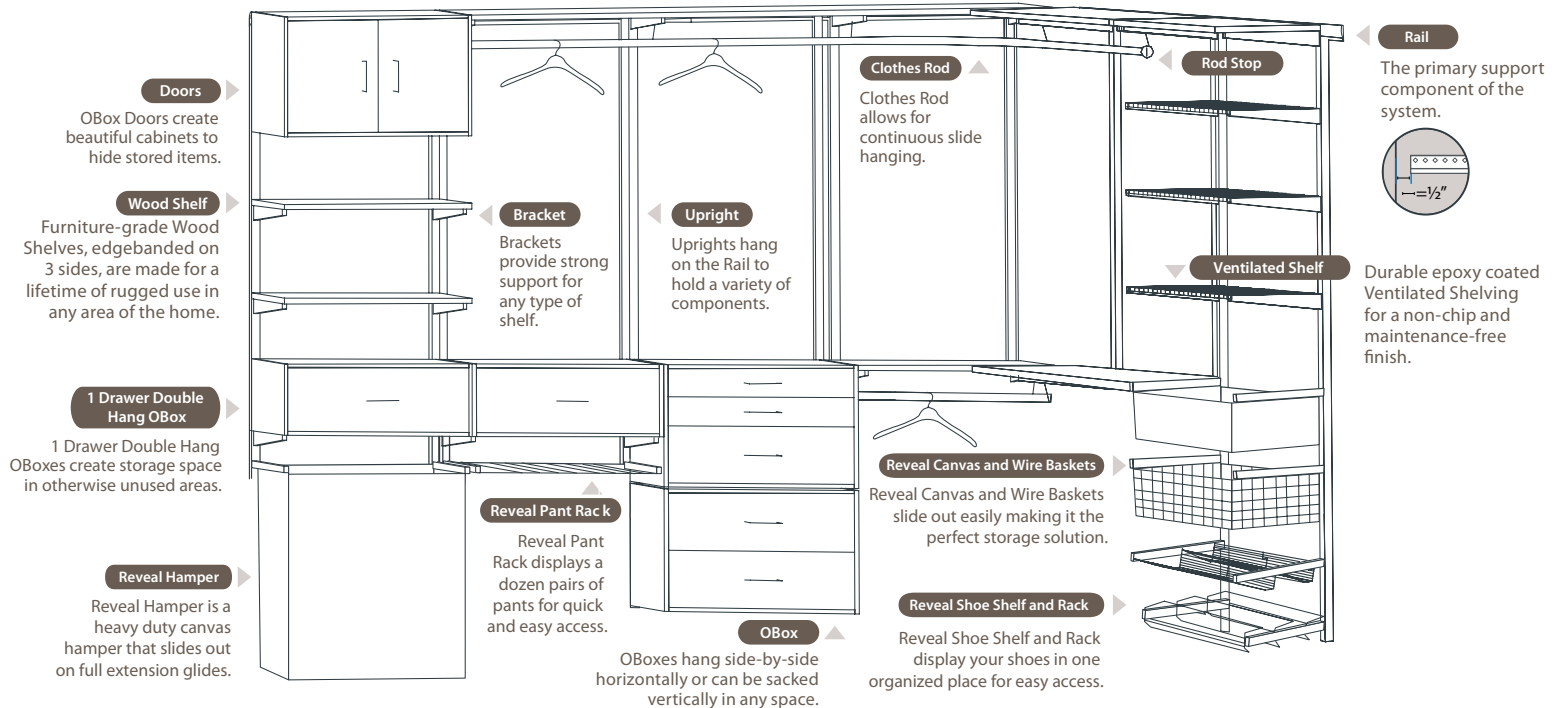

3 PART SPECIFICATION HIGHLIGHTS

PART 1 GENERAL Quality Assurance

A. Manufacturer Qualifications: With more than 100 years of engineering and manufacturing excellence, Organized Living delivers the strongest home storage and organization solutions for every area of the home.

B. Installer Qualifications: Factory trained and product experienced.

C. Provide Computer Generated 3-Dimensional drawings for each design variation.

D. Mock-Up: Provide a mock-up for evaluation of surface preparation techniques and application workmanship.

1. Finish areas designated by Architect.
2. Do not proceed with remaining work until workmanship, color, and product selection are approved by Architect.
3. Refinish mock-up area as required to produce acceptable work.

Warranty

Manufacturer warrants to the original purchaser of properly installed Organized Living products, that its products will remain free of any defects in material and workmanship for a period of ten (10) years from

the date of purchase. The word "defects", as used in this warranty, is defined as imperfections which impair the utility of the product. This warranty applies only to properly installed Organized Living products used for domestic and consumer purposes. In the case of installation of Organized Living products used for industrial, commercial, or business purposes, these same products are warranted to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase.

PART 2 PRODUCTS Manufacturers

A. Acceptable Manufacturer: Organized Living;
3100 E Kemper Rd, Cincinnati, OH 45241.
Tel: (800) 669-3225

Tel: (513) 277-3700

Fax: (513) 277-3701

Email: customerservice@organizedliving.com
www.organizedliving.com

B. Substitutions: Not permitted due to Organized Living higher quality engineering specifications.

Closet Systems – freedomRail

A. Products: freedomRail adjustable shelving closet system as manufactured by Organized Living; including components and accessories as required for complete installation.

B. Structural Performance: Hanging Rail mounted to wall with mounting hardware every 8" (203 mm).

1. Uprights spaced 36 inches apart, the shelf supports 50 pounds per linear foot (77 kg/m). Uprights are hung from Rail. To allow future owner adjustment, do not install Uprights into wall.
2. For extra heavy applications, place Uprights 24" (610 mm) apart, Shelf supports 100 pounds per linear foot.

PART 3 EXECUTION Installation

A. Can be installed in any substrates in accordance with manufacturer's instructions.

B. When applicable, cut Shelving up to 1" shorter than the length of the wall measurements, cap all exposed ends.

C. Install system plumb and level and in accordance with shop drawings and manufacturers printed installation instructions.

Maintenance and Cleaning

Organized Living freedomRail is made with a durable epoxy powder coating or furniture-grade laminate that requires no regular maintenance. If required, the Shelving may be cleaned with a dry dusting rag or if a stronger cleaning is required, the shelving may be cleaned with any non-abrasive household cleaner and water.

Visit OrganizedLiving.com to download the full 3-Part Specifications and to get closet design ideas.
Call us at 513-277-3700. We can create custom designs for your projects that convert to shop drawings.




Organized Living engineers the strongest ventilated wire shelving available. Lifetime Ventilated stands out as the best ventilated wire system in the industry by specifying larger diameter wire, higher quality, more durable epoxy powder coating, and a stronger anchoring system.

Why Specify Lifetime Ventilated?



- Only wire shelving to hold 75 lbs. per linear foot.
- Durable white or nickel epoxy coated wire for a lifetime of non-chip, non-stick performance.
- Epoxy coating won't get sticky over time and affect hangar movement like standard vinyl coating.
- Patented hardware.
- Green features that contribute up to six LEED points.
- No blocking required.
- Lifetime warranty.
- Proudly made in the USA.

COMPARISON OF UPPER FRONT ROD ON STORAGE SHELF

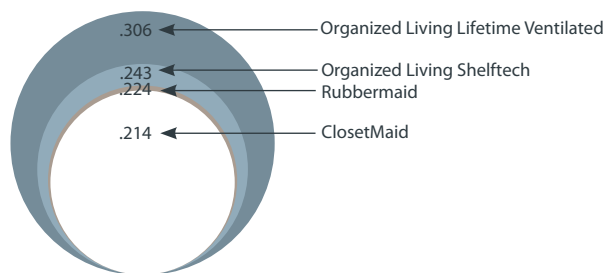


- 43% more steel than ClosetMaid
- 37% more steel than Rubbermaid
- 26% more steel than Shelftech

These are true scale comparisons of uncoated rods.


SUPERIOR HARDWARE

Only Organized Living Lifetime uses a true hollow wall anchor that rosettes to create a 360° degree contact behind the wall holding 40–50% more than the competition.

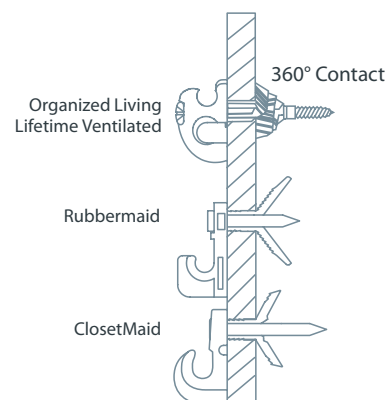



HOLDS MORE WEIGHT

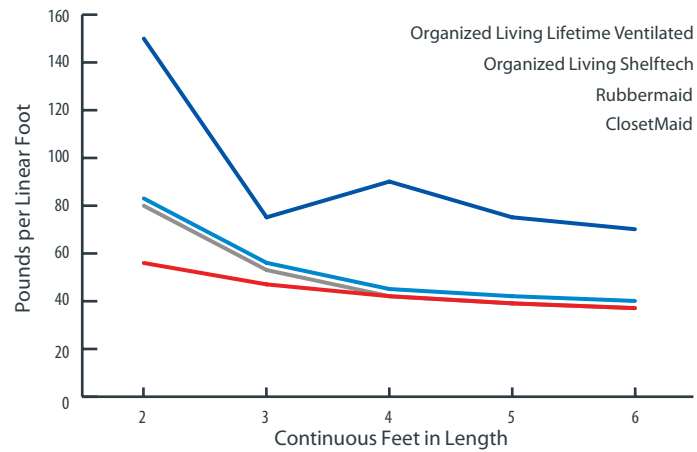

LIFETIME QUICK SPECIFICATIONS

APPLICATIONS: Walk-in closet, reach-in closet, secondary bedroom closet, linen closet, coat closet, pantry, laundry room, storage room.

MOUNTING: Wall mount.

SPECIFICATIONS: Procure and install Organized Living ventilated commercial-grade, epoxy wire shelving, nickel or white color options in all closets and storage spaces. Grade C 1008 cold drawn steel rod with an average tensile strength of 100,000 psi. Manufactured by Organized Living, Cincinnati, Ohio, 513-277-3700.

STATIC LOAD: 75 lb/ft shelf maximum.

3 PART SPECIFICATION HIGHLIGHTS

PART 1 GENERAL

Quality Assurance

A. Manufacturer Qualifications: With more than 100 years of engineering and manufacturing excellence, Organized Living delivers the strongest home storage and organization solutions for every area of the home.

B. Installer Qualifications: Factory trained and product experienced.

C. Provide Computer Generated 3-Dimensional drawings for each design variation.

D. Mock-Up: Provide a mock-up for evaluation of surface preparation techniques and application workmanship.

1. Finish areas designated by Architect.
2. Do not proceed with remaining work until workmanship, color, and product selection are approved by Architect.
3. Refinish mock-up area as required to produce acceptable work.

Warranty

Manufacturer warrants to the original purchaser of properly installed Organized Living Lifetime wire shelving, that it will remain free of any defects in material and workmanship for as long as the original purchaser owns the product. The word "defects", as used in this warranty, is defined as imperfections which impair the utility of the product. This warranty applies only to properly installed Organized Living Lifetime Ventilated Shelving used for domestic and consumer purposes. In the case of installation of Lifetime Ventilated Shelving used

for industrial, commercial or business purposes, these same products are warranted to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase.

PART 2 PRODUCTS

Manufacturers

A. Acceptable Manufacturer: Organized Living;
3100 E Kemper Rd, Cincinnati, OH 45241.
Tel: (800) 669-3225 Tel: (513) 277-3700
Fax: (513) 277-3701

www.organizedliving.com

Email: customerservice@organizedliving.com.

B. Substitutions: Not permitted due to Organized Living higher quality engineering specifications on wire and rod gauges and baked on epoxy powder coating.

Closet Systems – Ventilated Storage Systems

Blocking is not required for Organized Living's Ventilated Storage Systems. Components are coated with beautiful white or nickel epoxy for a lifetime of non-chip, non-stick performance. Epoxy powder coating is environmentally friendly and contributes to LEED points.

A. Lifetime Ventilated storage systems as manufactured by Organized Living including component and accessories as required for complete installation.

B. Structural Performance: Back clips spaced 11" (279 mm) with support braces at 42" (1067 mm).

1. Static Load: 75 lb/ft (115 kg/m) of shelf maximum.
2. For heavy duty applications in pantry and garage applications space support brace on 2' (610mm).

PART 3 EXECUTION

Installation

A. Can be installed in any substrates in accordance with manufacturer's instructions.

B. Cut shelving up to 1" shorter than the length of the wall measurements, cap all exposed ends.

C. Install Shelving Plumb and Level and in accordance with shop drawings and manufacturers printed installation instructions.

Maintenance and Cleaning

Organized Living Lifetime Ventilated Shelving is coated with a durable epoxy powder coating that requires no regular maintenance. The shelving may be cleaned with a dusting cloth or with a non-abrasive, mild household cleaner.

Visit OrganizedLiving.com to download the full 3-Part Specifications and to get closet design ideas. Call us at 513-277-3700. We can create custom designs for your projects that convert to shop drawings.



Differentiate and elevate your projects with Organized Living **Select**, the fastest and strongest built-in wood system available. Select allows builders and multifamily professionals to affordably satisfy their resident's desire for a built-in closet system that aligns to the other amenities of the property. The heavy-gauge patented Rail, furniture-grade wood, and proprietary hardware combine to create the strongest wood rail system available.

Why specify Select?

- Strongest and fastest built-in system available.
- Design Libraries make it easy to specify the right Closet Design Level for your project. No designing required.
- Rail holds 170 lbs per linear foot, no blocking needed, easy stud installation.
- Furniture-grade wood shelving, $\frac{3}{4}$ " thick thermal-fused laminate.
- Full-extension soft-close drawer glides and soft-close hinges.
- 2 mil thick radius edge banding.
- 10 year limited warranty.
- Proudly made in the USA.
- ADA compliant.

Get started today! Visit [OrganizedLiving.com](https://www.organizedliving.com) now.

Select is an affordable system designed to be superior in strength and still meet the demands of residents who want a built-in closet system. Specify Select quickly with Design Libraries available in Closet Selector[®]. Select will differentiate your property, increase rental income and retain residents longer.

Quick to Install.

Select is production-oriented so installers can finish projects fast, saving time and money.

Superior Strength.

We confidently offer a 10 year limited warranty allowing your residents to load up their shelving without worry.

Meet Demand.

From economy to luxury, Select can be designed to match the level of amenities used throughout the rest of the unit.

Select®

is available in these on-trend finishes.



White

Chocolate
Pear

Century
Gray

Snowdrift
Live*

*Touchable Texture




SELECT QUICK SPECIFICATIONS

APPLICATIONS: Walk-in closet, reach-in closet, secondary bedroom closet, linen closet, coat closet, pantry, open wall shelving, laundry room, mudroom, entertainment center, storage room.

MOUNTING: Wall mount into studs.

SPECIFICATIONS: Procure and install Select rail-based, built-in closet shelving system, in all closets and storage spaces. Provide with 1" diameter chrome clothes rod for hanging areas. Manufactured by Organized Living, Cincinnati, Ohio, 513-277-3700.

STATIC LOAD: 170 lb/ft maximum.

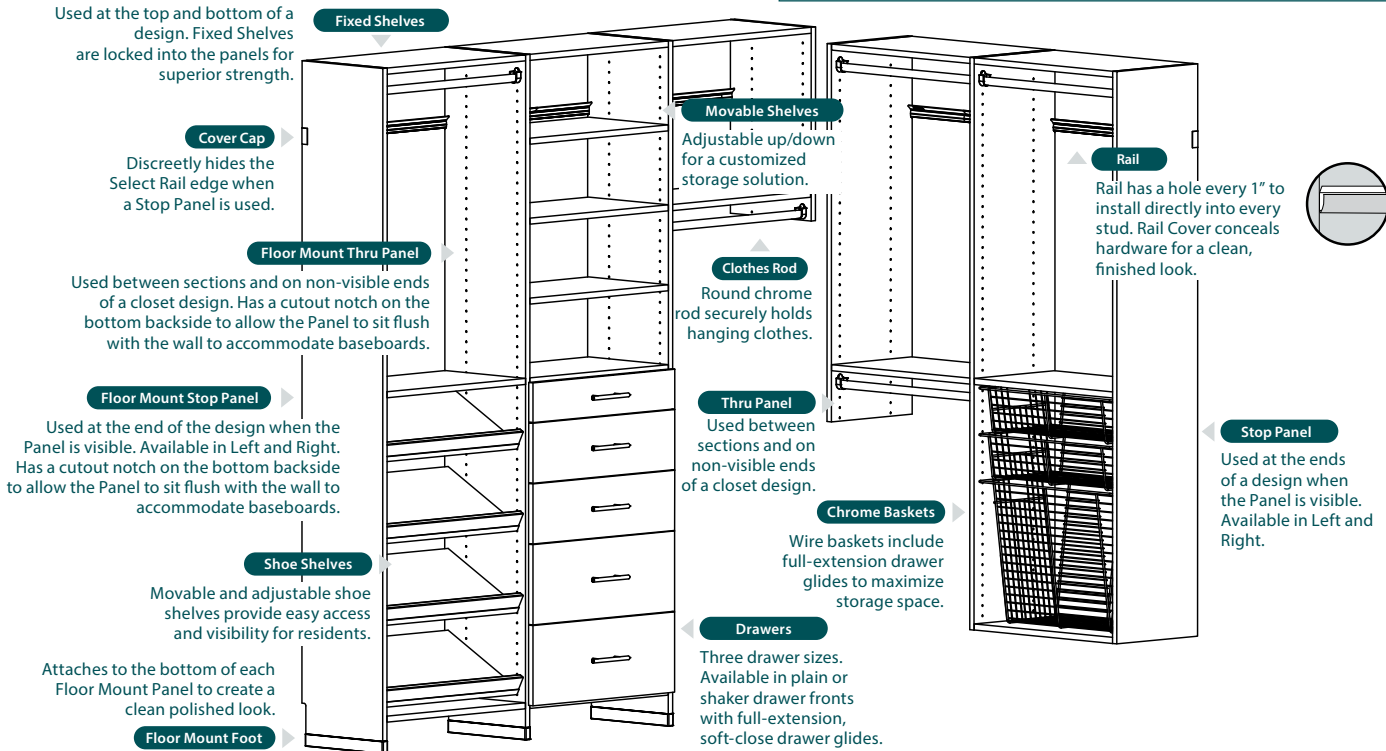

3 PART SPECIFICATION HIGHLIGHTS

PART 1 GENERAL

Quality Assurance

A. Manufacturer Qualifications: With more than 100 years of engineering and manufacturing excellence, Organized Living delivers the strongest home storage and organization solutions for every area of the home.

B. Installer Qualifications: Factory trained and product experienced.

C. Provide Computer Generated 3-Dimensional drawings for each design variation.

D. Mock-Up: Provide a mock-up for evaluation of surface preparation techniques and application workmanship.

1. Finish areas designated by Architect.
2. Do not proceed with remaining work until workmanship, color, and product selection are approved by Architect.
3. Refinish mock-up area as required to produce acceptable work.

Warranty

Manufacturer warrants to the original purchaser of properly installed Organized Living products, that its products will remain free of any defects in material and workmanship for a period of ten (10) years from the date of purchase. The word "defects", as used in this warranty, is defined as imperfections which impair the utility of the product. This warranty applies only to

properly installed Organized Living products used for domestic and consumer purposes. In the case of installation of Organized Living products used for industrial, commercial or business purposes, these same products are warranted to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase.

PART 2 PRODUCTS

Manufacturer

A. Acceptable Manufacturer: Organized Living;
3100 E Kemper Rd, Cincinnati, OH 45241.
Tel: (800) 669-3225 or (513) 277-3700 Fax: (513) 277-3701
Email: customerservice@organizedliving.com
www.organizedliving.com

B. Substitutions: Not permitted due to Organized Living higher quality engineering specifications.

Closet Systems – Select

A. Products: Select built-in wood laminate shelving closet system as manufactured by Organized Living; including components and accessories as required for complete installation.

B. Structural Performance: Hanging Rail mounted to wall with mounting hardware every 8" (203mm). Panel system with Fixed and Movable Shelves.

1. 12 gauge Rail, with diamond-shaped holes every 1", to be mounted to the wall with mounting hardware every 8" or less, installed into studs and drywall with specified hardware.

2. Furniture grade, ¾" thermal-fused laminate panels, shelves, drawers, cabinets, and drawer and door faces. Edgebanding as indicated on drawings and required for complete installation.

3. Drawers include full-extension soft-close drawer glides. Chrome handles.

4. Doors include 3-way adjustable, soft-close concealed hinges. Chrome handles.

5. Accessories: Tie/Belt Rack, Next Day Rod, Jewelry Drawer Insert, Chrome Baskets as indicated on drawings and required for complete installation.

PART 3 EXECUTION

Installation

A. Can be installed in any substrates in accordance with manufacturer's instructions.

B. Install Select system plumb and level and in accordance with design drawings and manufacturers printed installation instructions.

C. Install components true to line, square with adjacent components with drawer glides and working hardware operating smoothly without binding, or without gaps when closed.

Maintenance and Cleaning

Organized Living Select is made with a furniture grade laminate that requires no maintenance. If required, the shelving may be cleaned with a dry dusting rag or if a stronger cleaning is required, the shelving may be cleaned with any non-abrasive household cleaner and water.

Visit OrganizedLiving.com to download the full 3-Part Specifications and to access Closet Design Levels.
Call us at 513-277-3700. We can create custom designs for your projects that convert to shop drawings.



Open Slide Hanging Shelf
1720-1212-11 12"D x 12"W



Hanging Shelf
1120-1212-11 12"D x 12"W



Storage Shelf
1220-1212-11 12"D x 12"W
1220-1612-11 16"D x 12"W



Tight Mesh Storage Shelf
1520-0912-11 9"D x 12"W
1520-1212-11 12"D x 12"W
1520-1612-11 16"D x 12"W

Architectural Specifications:

Coating

- Organized Living coats shelving with custom-formulated, anti-marring, hybrid epoxy, appliance-grade finish that is nonporous, nonabsorbent and lasts a lifetime.
- The epoxy coating is electrostatically applied and then oven cured to provide continuous coverage on all surfaces at 3-5 mils thickness.
- Epoxy is the most durable coating available and allows for up to five times easier hanger movement (left to right) than vinyl. This epoxy coating won't get sticky over time like standard vinyl coating.

Steel

- Grade C 1008 cold drawn steel rod with an average tensile strength of 100,000 psi.

Cleaning


- The metal is cleaned and phosphated to ensure the coating bonds perfectly.

Load Capacity:

- With back clips spaced every 11", support braces every 36" and side wall brackets where applicable, weight capacity is:

Shelving length	Wall to Wall per ft	Wall to Open per ft	Open to Open per ft
2 ft	75	70	65
3 ft	60	50	45
4 ft	55	45	40
5 ft	50	40	35
6 ft	45	35	30
6 ft +	45	35	30

Basic Measurements and Spacing Guidelines:

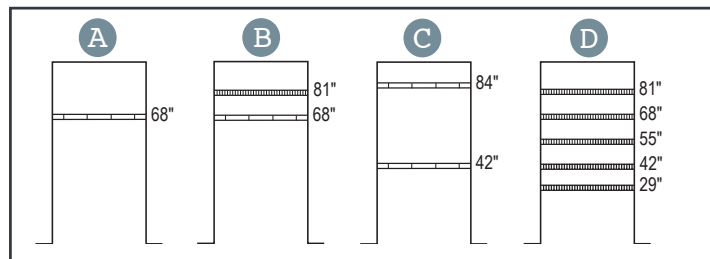

A. Simple Single Hang – Place a shelf at 68" above floor.

B. Single Hang – Place a linen shelf at 81" above floor and shelf and rod at 68."

C. Double Hang – Mount 2 shelves and rod at 42" and 84" above floor.

D. Multiple shelves – install stacked linen shelves 13" apart.

Hardware:


Back Clips – Attach to back wall every 11". Pre-loaded. Drill 1/4" holes. DO NOT PUNCH. Can also be used as a down back clip.

Side Wall Brackets – Support shelf at side wall. Double anchor secures heavy loads. Pre-loaded. Comes in two sizes – Open Slide uses a 3" (76mm) tall Side Wall Bracket, all other shelves use a 2" (51mm) tall Side Wall Bracket.


Support Braces/Support Poles – Support shelf at center or open end. Space every 36". For heavy loads, space every 24".

Support Brace Anchors – Pin driven anchors are inserted into the bottom of support braces to secure it. Pre-loaded.

Strap Back Clips/Versa Clip as Down Back Clip – To prevent shelf from popping out of back clips. For extra strength securing into studs.




Back Clip/Down Back Clip



Strap Back Clip and Screw

Back clips ① serve a dual purpose and can be used as a down back clip ⑤ by placing above the back rod. Use every 24" (Shelf and Rod only) and at the end of every open-ended shelf. Down Back Clips are used in addition to Back Clips.

For heavy loads, a Strap Back Clip is to be substituted using two #8 x 1" screws into studs.

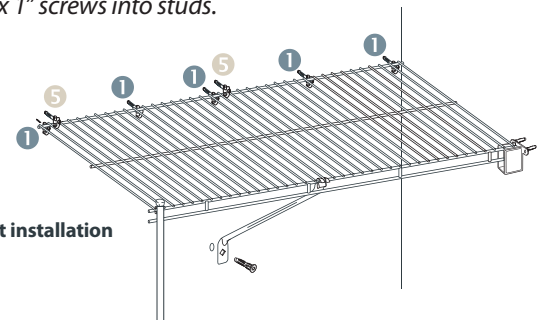

Typical 4-foot installation

Installation:

- Install both Hanging Shelf or Tight Mesh with components from three groups of hardware - Back Clips, Side Wall Brackets and Braces/Anchors.
- Cut shelving for wall-to-wall installations up to 1" shorter than the measured width to allow for Side Wall Brackets and out of square walls. Cut all other shelving to exact lengths.
- All Back Clips/Down Back Clips are to be fully inserted into wall before Pin is driven.

SHELFTECH QUICK SPECIFICATIONS

APPLICATIONS: Walk-in closet, reach-in closet, secondary bedroom closet, linen closet, coat closet, pantry, laundry room, storage room.

MOUNTING: Wall mount.

SPECIFICATIONS: Procure and install Organized Living Shelftech ventilated white, epoxy wire shelving in all closets and storage spaces. Manufactured by Organized Living, Cincinnati, Ohio, 513-277-3700.

STATIC LOAD: 45 lb/ft shelf maximum.

3 PART SPECIFICATION HIGHLIGHTS

PART 1 GENERAL

Quality Assurance

A. Manufacturer Qualifications: With more than 100 years of engineering and manufacturing excellence, Organized Living delivers the strongest home storage and organization solutions for every area of the home.

B. Installer Qualifications: Factory trained and product experienced.

C. Provide Computer Generated 3-Dimensional drawings for each design variation.

D. Mock-Up: Provide a mock-up for evaluation of surface preparation techniques and application workmanship.

1. Finish areas designated by Architect.
2. Do not proceed with remaining work until workmanship, color, and product selection are approved by Architect.
3. Refinish mock-up area as required to produce acceptable work.

Warranty

Manufacturer warrants to the original purchaser of properly installed Organized Living products, that its products will remain free of any defects in material and workmanship for a period of ten (10) years from the date of purchase. The word "defects", as used in this warranty, is defined as imperfections which impair the utility of the product. This warranty applies only to properly installed Organized Living products used for

domestic and consumer purposes. In the case of installation of Organized Living products used for industrial, commercial or business purposes, these same products are warranted to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase.

PART 2 PRODUCTS

Manufacturers

A. Acceptable Manufacturer: Organized Living Corp;

3100 E Kemper Rd, Cincinnati, OH 45241

Tel: (800) 669-3225 Tel: (513) 277-3700

Fax: (513) 277-3701

www.organizedliving.com.

Email: customerservice@organizedliving.com.

B. Substitutions: Not permitted due to Organized Living's higher quality engineering specifications on wire and rod gauges and baked on epoxy powder coating.

Closet System – Shelftech Ventilated Shelving

****NOTE TO SPECIFIER**** Blocking is not required for Organized Living's Ventilated Storage Systems. Components are coated with beautiful white epoxy for a lifetime of non-chip, non-stick performance. Epoxy powder coating is environmentally friendly and contributes to LEED points.

A. Products: Shelftech Ventilated storage systems as manufactured by Organized Living; including component and accessories as required for complete installation.

****NOTE TO SPECIFIER**** Shelftech Ventilated support structure loading. Delete if not required for project.

B. Structural Performance: Back clips spaced 11" (279 mm) with support braces at 3' (914.4 mm).

1. Static Load: 45 lb/ft (66.97 kg/m) of shelf minimum.
2. For heavy duty applications in pantry and garage applications space support brace on 2' (610 mm).
3. Back Clips to be Shelftech pin driven hardware.
4. Down Back Clips shall be Tri-Loc® II Patented hollow wall anchoring system.

PART 3 EXECUTION

Installation

A. Can be installed in any substrates in accordance with manufacturer's instructions.

B. Cut shelving up to 1" shorter than the length of the wall measurements, cap all exposed ends.

C. Install Shelving Plumb and Level and in accordance with shop drawings and manufacturers printed installation instructions.

Maintenance and Cleaning

Organized Living Lifetime Ventilated Shelving is coated with a durable epoxy powder coating that requires no regular maintenance. The shelving may be cleaned with a dusting cloth or with a non-abrasive, mild household cleaner.



VUE is a fixed wood shelf and rod system combining quality wood shelving and hardware to create an economical wood storage solution. It's designed for a refined custom fit with fast, accurate installation. Beautifully crafted with $\frac{3}{4}$ " thick thermal laminate and 2 mil radius edgebanding, it's the fixed economical solution to provide wood shelving for a range of storage spaces.

Why specify VUE?

- New patent-pending design for gap-free installation.
- No exposed screws create a clean, polished look.
- Installs after paint and requires no painting or caulking. No Blocking necessary.
- Installs easily into metal or wood studs.
- Patented Tri-Loc® anchor hardware and heavy duty brackets for superior strength.
- Manufactured with $\frac{3}{4}$ " thick thermal laminate board shelving with radius edgebanding.
- Green manufacturing so your project earns LEED points.
- No harmful VOCs.

Get started today! Visit [OrganizedLiving.com](https://www.OrganizedLiving.com) now.

VUE is an affordable system designed to be superior in strength and still meet the demands of residents who want solid wood shelving. Specify VUE quickly with Design Libraries available in Bid360™. VUE will differentiate your property, increase rental income, and retain residents longer.

Quick to Install.

VUE is production-oriented so installers can finish projects fast, saving time and money.

Superior Strength.

We confidently offer a 10 year limited warranty allowing your residents to load up their shelving without worry.

Meet Demand.

From economy to upgrade, VUE can be designed to match the level of amenities used throughout the rest of the unit.

VUE

Available finishes.



White



Chocolate
Pear



Century
Gray

(Coming Soon!)




VUE QUICK SPECIFICATIONS

APPLICATIONS: Walk-in closet, reach-in closet, secondary bedroom closet, linen closet, coat closet, pantry, laundry room, storage room.


MOUNTING: Wall Mount

SPECIFICATIONS: Procure and install Organized Living VUE solid wood smooth, snag-free fixed shelving and polyresin shelf brackets with no exposed screws in all closets and storage spaces. Manufactured by Organized Living, Cincinnati, Ohio, 513-277-3700.


STATIC LOAD: 85 lbs / linear foot maximum

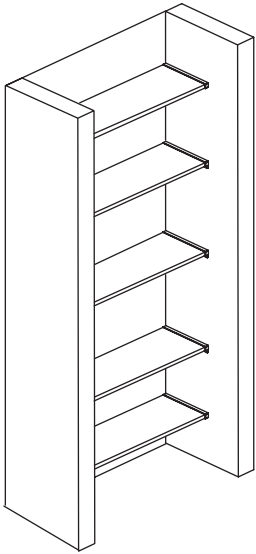

No Shelf Brackets needed in <36" wall-to-wall reach-in closets.

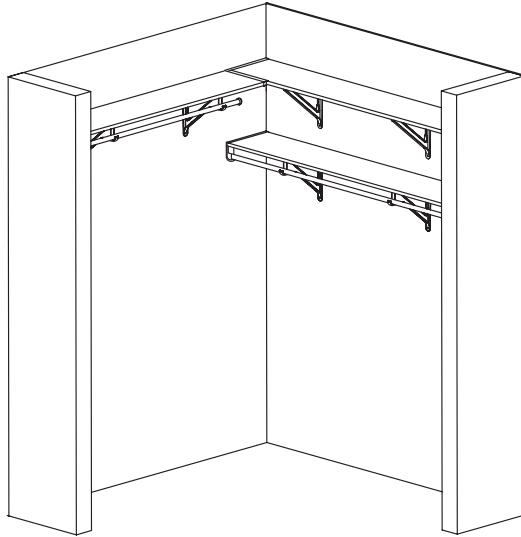

Economically maximize storage space with wall-to-wall single hang and double hang storage. No exposed hardware for a clean, polished look.

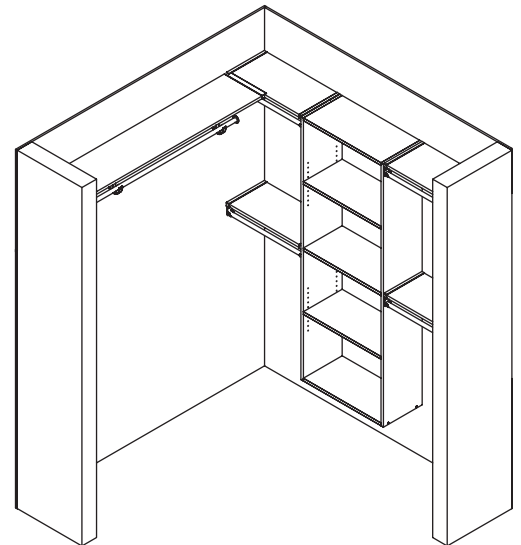

Upgrade a walk-in closet with a VUE Shelf Tower (accessories available).

3 PART SPECIFICATION HIGHLIGHTS

PART 1 GENERAL Quality Assurance

A. Manufacturer Qualifications: With more than 100 years of engineering and manufacturing excellence, Organized Living delivers the strongest home storage and organization solutions for every area of the home.

B. Installer Qualifications: Factory trained and product experienced.

C. Provide Computer Generated 3-Dimensional drawings for each design variation.

D. Mock-Up: Provide a mock-up for evaluation of surface preparation techniques and application workmanship.

1. Finish areas designated by Architect.
2. Do not proceed with remaining work until workmanship, color, and product selection are approved by Architect.
3. Refinish mock-up area as required to produce acceptable work.

Warranty

Manufacturer warrants to the original purchaser of properly installed Organized Living products, that its products will remain free of any defects in material and workmanship for a period of ten (10) years from the date of purchase. The word "defects", as used in this warranty, is defined as imperfections which impair the utility of the product. This warranty applies only to properly

installed Organized Living products used for domestic and consumer purposes. In the case of installation of Organized Living products used for industrial, commercial or business purposes, these same products are warrantied to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase.

PART 2 PRODUCTS Manufacturer

A. Acceptable Manufacturer: Organized Living; 3100 E Kemper Rd, Cincinnati, OH 45241. Tel: (800) 669-3225 or (513) 277-3700 Fax: (513) 277-3701 Email: customerservice@organizedliving.com organizedliving.com

B. Substitutions: Not permitted due to Organized Living higher quality engineering specifications.

Closet Systems – VUE

A. Products: VUE built-in wood laminate shelving closet system as manufactured by Organized Living; including components and accessories as required for complete installation.

B. Structural Performance:

1. Glass filled – Polypropylene Blend - shelf brackets, mounted to studs with mounting hardware, spaced 16" (406.4mm) to 32" (812.8mm) apart.
2. High Impact Polystyrene sidewall brackets and covers, mounted into drywall with mounting hardware, on each end wall.

3. Furniture grade, ¾" (19mm) thermal-fused laminate shelves. Edge banding as indicated on drawings and required for complete installation.

4. 12" deep 5 shelf tower and a 14" deep 5 shelf tower with accessories.

PART 3 EXECUTION Installation

A. Sidewall Brackets can be installed in any substrate, hollow or solid, in accordance with manufacturer's instructions.

B. Shelf Brackets must be installed onto any solid substrate or directly into wood or metal studs per manufacture's instruction.

C. Install VUE system plumb and level and in accordance with design drawings and manufacturers printed installation instructions.

D. Install components true to line, square with adjacent components with drawer glides and working hardware operating smoothly without binding, or without gaps when closed.

Maintenance and Cleaning

Organized Living VUE is made with a furniture grade laminate that requires no maintenance. If required, the shelving may be cleaned with a dry dusting rag or if a stronger cleaning is required, the shelving maybe cleaned with any non-abrasive household cleaner and water.

Visit OrganizedLiving.com to download the full 3-Part Specifications and to access Closet Design Levels. Call us at 513-277-3700. We can create custom designs for your projects that convert to shop drawings.



Premium Wood Closet System

Rubbermaid
HEIRLOOMTM
COLLECTION






Rubbermaid®

With over 30 years of experience in the industry, Rubbermaid® is proud to continue to be a trusted brand for storage and organization solutions that builders and homeowners can trust.

Rubbermaid's closet systems are GreenGuard certified, ensuring a sustainable choice for your home and are proudly made in Jackson, Missouri.

**To learn more, please visit:
Rubbermaidpro.com**







The Heirloom™ Collection from Rubbermaid® is a classic closet collection that masterfully combines expert workmanship with quality materials for a premium storage solution tailored to the homeowner's needs.

Rubbermaid®
HEIRLOOM™
COLLECTION






This selection of elegant, long-lasting white wood is a blank canvas for true personalization. From minimalist style to contemporary aesthetic, this collection offers the ideal foundation to bring any homeowner's organizational vision to life.

Rubbermaid
HEIRLOOMTM
COLLECTION

Every wood component of this collection is made of 3/4" thick furniture grade particleboard covered in thermo-fused melamine. All visible edges are covered with PVC edge banding for a refined and durable finish.





Every detail is meticulously crafted, from hardware and accessories to crown molding and multiple mounting options, ensuring a cohesive and refined look that leaves no detail untouched.



Rubbermaid
HEIRLOOMTM
COLLECTION



Mounting Styles

This collection can be installed as a floor mount system or wall mount system.

Refined Details

Sleek satin nickel hardware includes hang rods, shoe fences, pole cups, and handles.

Premium Features

Drawers and cabinet doors feature a traditional raised panel design and are available in different sizes to fit any custom configuration.

Finishing Touches

The crown and base molding are the perfect finishing touches for any closet.

Architectural Guide Specifications

Part 1 - General

1.1 Related Documents

- A. Drawings and general provisions of contract, including general and supplementary conditions and division-1 specification sections, apply to the work of this section.

1.2 Summary

- A. This section includes the components of the Heirloom Collection™. It does not include all of the accessories available.

1.3 Submittals

- A. Product Data: For the Heirloom Collection™. Include details of construction and connections relative to materials, dimensions of individual components, and accessories.

1.4 Quality Assurance

- A. Single source responsibility: Obtain melamine storage shelving from a single manufacturer.

1.5 Delivery, Storage, and Handling

- A. Comply with instructions and recommendations of manufacturer for special delivery, storage, and handling requirements.
- B. Store shelving in a manner to avoid significant or permanent damage of shelves, partitions, and other components.

1.6 Coordination

- A. Coordinate layout and installation of Heirloom Collection™ melamine storage shelving with other construction to which it is attached including floor, partitions and wall assemblies.

Part 2 - Products

2.1 Manufacturers

- A. Manufacturers: Subject to compliance with requirements, provide products by the following: Rubbermaid Home Products.

2.2 Materials

- A. Wood components of the Heirloom Collection™ system are made of ¾" thick furniture grade particleboard with a density of 45 pounds per cubic foot, covered with thermo-fused melamine.
- B. Composite panel product composed of resin and wood fibers of varying percents (dependent on properties and thickness) pressed into panels of various sizes.

2.3 Finishes

- A. All visible edges are covered with 1mm (.039") PVC edge banding.

2.4 Mounting Hardware

- A. Mounting hardware components shall provide installation to walls with concealed structural members.
- B. Mounting hardware options: floor mount vs. wall mount.
- C. Material: all steel European hardware system.
- D. Hardware Components:

- | | | |
|-------------------------------------|---------------------------------|----------------------------|
| 1. Cam locks | 6. Shelf joiner – H channel | 11. Steel screws |
| 2. Screw-in cam bolt | 7. Full extension drawer glides | 12. Euro screw |
| 3. Double end dowel | 8. Notch covers | 13. Toggle bolt and anchor |
| 4. Hang rail and mounting rail | 9. Edge banding | 14. Shelf pins |
| 5. Wall mount bracket and cover set | 10. Angle brackets | 15. Hanging rod socket |

2.5 Heirloom Collection™ Accessories

- A. Accessory options to be included with the Heirloom Collection™.
1. Drawer kits
 2. Door kits
 3. Base and crown molding
 4. Shoe shelves and kits

Architectural Guide Specifications (Continued)

Part 3 - Execution

3.1 Inspection

- A. Examine areas and conditions for compliance with requirements for installation tolerances, clearances, and other conditions affecting installation.
- B. Examine walls to which Heirloom Collection™ shelving will be attached for proper selection of appropriate fastening hardware.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 Installation

- A. Install shelving system and accessories after finishing operations, including painting have been completed. Install system to comply with final layout drawings, in strict compliance with manufacturers printed instructions. Position units level, plumb; at proper location relative to adjoining units and related work. Adjust accessories to provide visually acceptable installation.

3.3 Field Quality Control

- A. Remove and replace shelving components that are chipped, scratched, or otherwise damaged and which do not match adjoining work. Provide new matching units, installed as specified and in manner to eliminate evidence of replacement.

3.4 Adjust

- A. Adjust components and accessories to provide visually acceptable installation.

3.5 Cleaning

- A. Remove surplus materials, rubbish and debris resulting from installation upon completion of work and leave areas of installation in neat, clean condition.

Closet Shelf Load Capacities*

14" Shelf Depth		
Shelf Length	Shelf Depth	Total Weight per Shelf
18"	14"	100 lbs
24"	14"	90 lbs
30"	14"	55 lbs
36"	14"	40 lbs

19" Shelf Depth		
Shelf Length	Shelf Depth	Total Weight per Shelf
18"	19"	140 lbs
24"	19"	120 lbs
30"	19"	70 lbs
36"	19"	50 lbs

*Based on recommended installation methods.

- Shelf weight capacities only; not system capacities.
- Shelf weight capacities based on the Composite Panel Association Technical Bulletin for particleboard shelving Engineering Design Guide Maximum Shelf span table.
- System load capacities may lower individual shelf capacities if the number of shelves is excessive.
- Shelf capacities will be lowered if the number of shelves attached to a vertical is excessive.



©2023 Rubbermaid Incorporated
8900 Northpointe Executive Park Drive, Huntersville, NC 28078
www.rubbermaidpro.com
1-877-533-1197

9/23 | 233404003

Reorder # 2206623

Rubbermaid



Rapid Shelf Closet System

Rubbermaid®



Rubbermaid

Rapid Shelf Closet System

With over 30 years of experience in the industry, Rubbermaid® is proud to continue to be a trusted brand for storage and organization solutions that builders and homeowners can rely on.

Combining speed, quality, and design, the Rapid Shelf Closet System provides a contemporary alternative to the traditional plank and pole shelving design. This system is GreenGuard certified, ensuring a sustainable choice for your home, and proudly made in Jackson, Missouri.

To learn more, please visit
[RubbermaidPro.com](https://www.RubbermaidPro.com).





Premium Look In Minutes

Featuring a closet system that fits within any wall type from U-shaped to L-shaped and even imperfect angles, the Rapid Shelf Closet System can be installed in minutes.

Featuring:

- **Quick One Person Assembly**
build with everyday tools
- **Flexible Design**
install on U-shaped and L-shaped walls
- **No Caulking Or Painting Required**
shelf back channel covers blemishes
- **Flawless Corners**
shelf trim solves for wall angle imperfections
- **Continuous-Slide Corner Solutions**
create a seamless look from wall to wall
- **Premium Finished Look**
shelf end cap covers unfinished shelf edges





One System For All Spaces


The Rapid Shelf Closet System is the ideal organization solution for any room, from residential homes to hotel suites. This system can be used in a variety of room types such as walk-in closets, pantries, linen closets and more.



Clean and Cohesive Look


The Rapid Shelf Closet System is available in a sleek white finish to meet the design needs of each job.

It can also be easily configured with all Heirloom Collection™ Closet System parts and accessories to add a new level of functionality and customization.

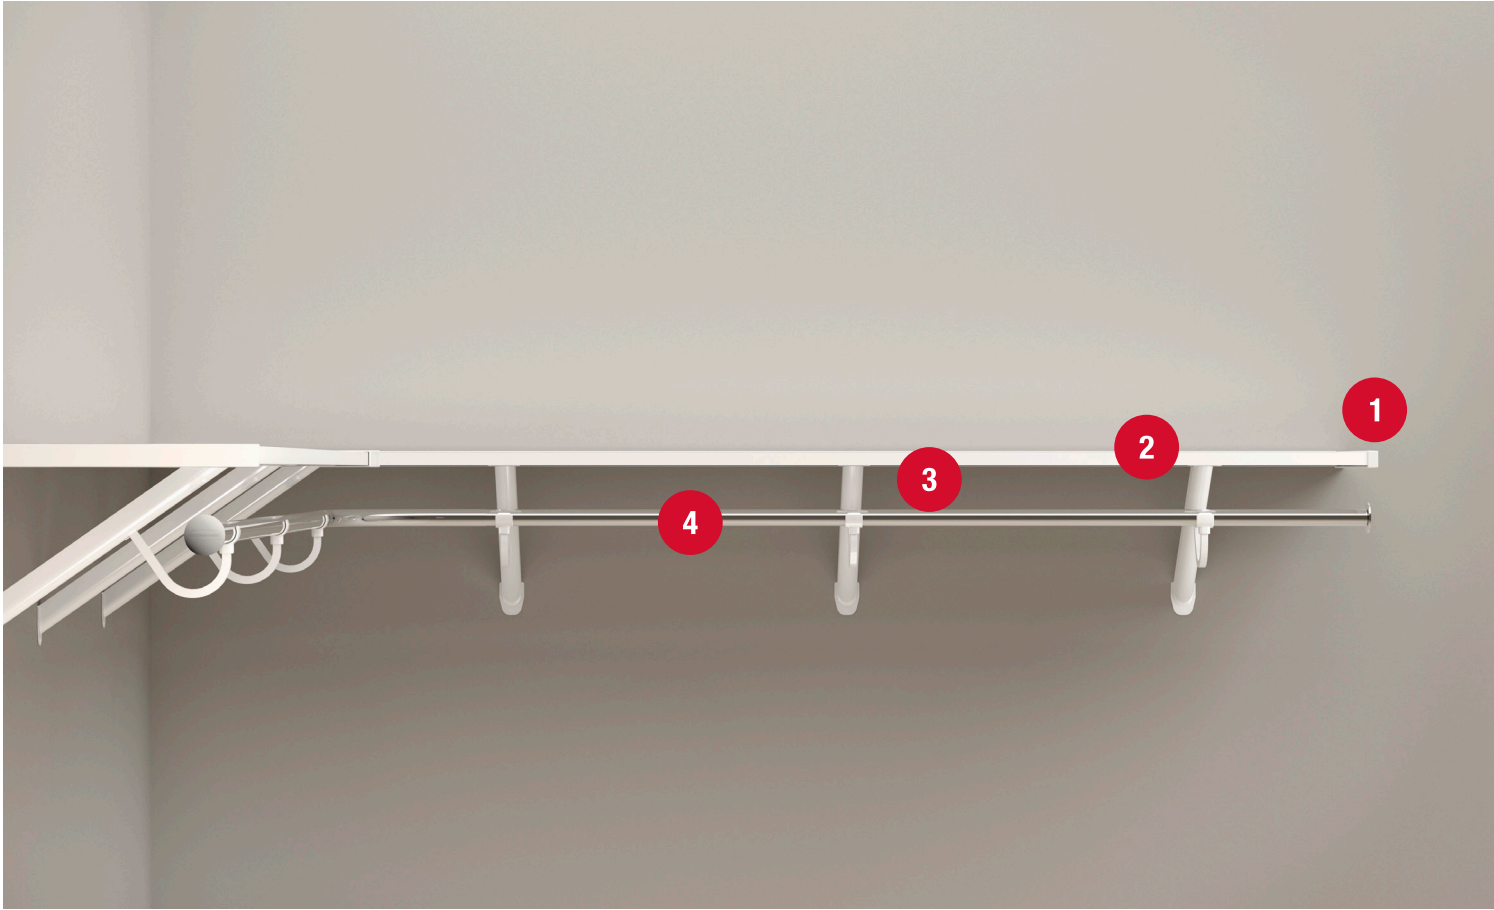

Component List

- | | |
|---------------------|----------------------------|
| 1. Shelf End Cap | 5. Trim |
| 2. Shelf | 6. Pole Cup |
| 3. Back Channel | 7. Angle Bracket with Hook |
| 4. Hang Rod End Cap | 8. Hang Rod |

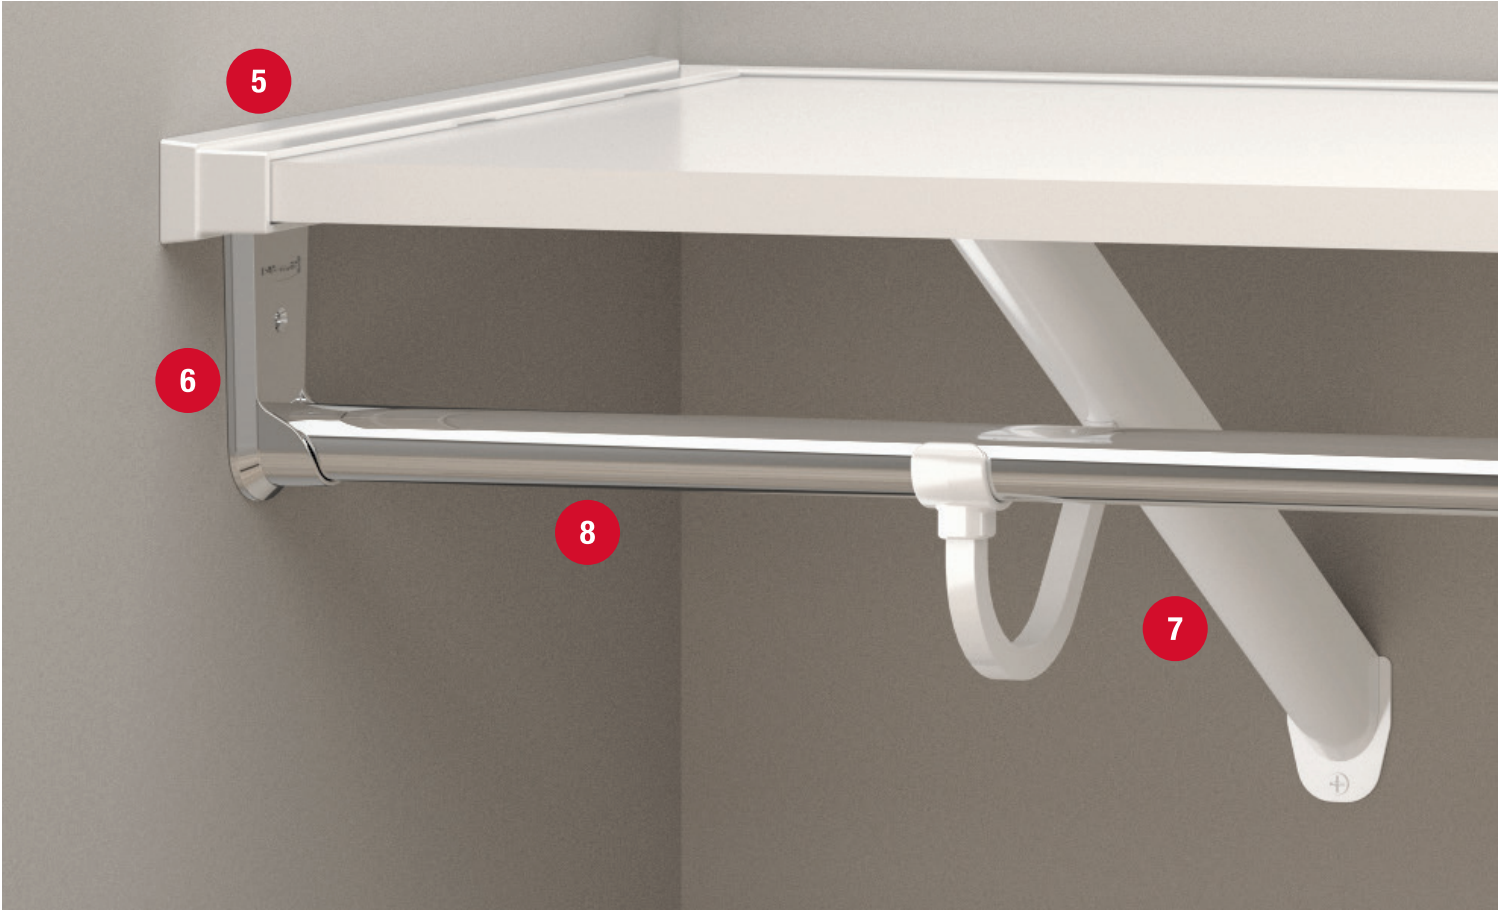










Component Guide

Component	Material	Dimensions	Finish
	Steel Powder Coated with ABS Pole Support	0.75" H × 14" D × 96" L 45 lbs / cu.ft Density	White
	Steel Powder Coated	0.75" H × 14" D × 96" L 45 lbs / cu.ft Density	White
	Stamped Steel Metal Powder Coated	0.75" H × 14" D × 96" L 45 lbs / cu.ft Density	White
	PP Copolymer Plastic	13.43" L × 1.11" W × 0.98" H	White
	PP Copolymer Plastic	12.93" L × 1.11" W × 0.98" H	White
	PP Copolymer Plastic	14.13" L × 0.605" W × 0.978" H	White
	PP Copolymer Plastic	0.75" H × 14" D × 96" L 45 lbs / cu.ft Density	White



Component Guide

Component	Material	Dimensions	Finish
	Stamped Steel Metal Powder Coated	0.75" H × 14" D × 96" L 45lbs./cu.ft Density	White
	Machined Steel	2.25" L × 0.96" Diameter	Satin Nickel
	Steel Plated Chrome	9.35" L × 1" Outer Diameter	Chrome
	Steel Chrome Plated	96" L × 1" Outer Diameter	Chrome
	Steel Plated Chrome	1.37" L × 1.75" Diameter	Chrome
	Cast Chrome Plated Industrial Grade Aluminum	0.75" H × 14" D × 96" L 45 lbs / cu.ft Density	Chrome
	Melamine	0.75" H × 14" D × 96" L 45 lbs / cu.ft Density	White

Architectural Guide Specifications

- A. Basis-of-Design Product:** Subject to compliance with requirements, provide Rubbermaid Incorporated; a Newell Brands company; Rubbermaid Rapid Shelf Closet System
- B. Laminate Shelving Panels:** Melamine-faced particleboard with applied-PVC edge banding, 0.039 inch (1 mm) thick:
1. Shelf Size: $\frac{3}{4}$ " \times 14" \times 96" (19 \times 356 \times 2438 mm).
 2. Shelf Loading Density: 45 lb f/cu. ft. (721 kg/cu. m).
 3. System Loading Capacity Over 96" (2438 mm): [280 lb (54 kg) drywall] [640 lb (63.5 kg) stud] mount per manufacturer's instructions.
- C. Closet Rod:**
1. Hang Rod: Industrial-grade cast aluminum, chrome plated.
 2. Hang Rod Size: 96" \times 1" (2438 \times 25 mm) diameter.
- D. Hardware:**
1. Support: Wall mount at [12" (305 mm)] [16" (406 mm)] [24" (610 mm)] o.c.
 2. Rod/Pole Cup: Industrial-grade cast aluminum, chrome plated.
 3. Corner Round Hanger Bar: Industrial-grade steel, chrome plated.
 4. Back Channel: Stamped steel, powder coated.
 5. Side Bracket: Stamped steel, powder coated.
 6. Angle Bracket: Industrial-grade steel, powder coated.
 7. Angle Bracket with Hanger Rod Support: Industrial-grade steel, powder coated, with polypropylene (PP) plastic pole support.
 8. Trim – Left, Right, Shelf End Cap, H-Channel Corner, H-Channel Straight: polypropylene (PP) copolymer plastic.
 9. Fasteners: Screws, anchors, brackets, and other devices of type, size, material, and finish for secure attachment; concealed where possible.
- E. Finishes:**
1. Wood (Particleboard) Finish: White
 2. Hardware Finish: White.

Additional Information

When desired shelf length exceeds 8':

1. Use straight H-Channel where end of boards meets to conceal gap

When joining boards in a corner between two walls:

1. Use corner H-Channel where boards meet to conceal gap

If using hang rod:

1. Combine multiple hang rods using hang rod joiner. Insert into both poles and screw until tight
2. A hang rod end cap should be used on rods used on open ended shelves
3. Corner hang rod should be used when combining pole sections at a corner

Regulatory Environmental Specifications

1. NEMA LD3-301 (Wear Resistance Cycle Testing)
2. ASTM D-1037-72A (Physical Properties Testing)
3. ASTM E-84 (Fire Code Testing)
4. CARB Certified
5. TSA Certified
6. FSC Certified
7. FSC-STD-40-004 V2-1
8. FSC-STD-40-005 V2-1
9. ANSI/Bifma X5.9 (System Testing)
10. Prop 65 testing (pending)

©2023 Rubbermaid Incorporated
8900 Northpointe Executive Park Drive, Huntersville, NC 28078
www.rubbermaidpro.com
1-877-533-1197

2206627

Rubbermaid®



Ventilated Wire Shelving System

Rubbermaid





Rubbermaid®

With over 30 years of experience in the industry, Rubbermaid® is proud to continue to be a trusted brand for storage and organization solutions that builders and homeowners can rely on.

Proudly designed and manufactured in the USA, our original wire innovations include the FreeSlide™ and TightMesh® shelf styles and FastSet Hardware® for intuitive shelf installation.

**To learn more, please visit:
Rubbermaidpro.com**

Left: Kitchen Pantry featuring TightMesh® Shelving on Pole





Optimal Storage Solutions

Rubbermaid's ventilated wire shelving selection provides optimal storage options for each area of the home, including storage rooms, utility rooms, laundry rooms, pantries, and closets.

Every wire shelf is proudly manufactured in Jackson, Missouri with 90% recycled and recyclable steel and backed by a limited lifetime warranty.



Opposite Top: Kitchen Pantry featuring TightMesh® on FastTrack® System

Opposite Bottom Left: Hallway Closet featuring TightMesh® and Linen Shelving on Wall Brackets

Opposite Bottom Right: Bedroom Closet featuring FreeSlide™ and TightMesh® Shelving on Pole and Wall Brackets

Top: Linen Closet featuring Linen Shelving on FastTrack® System



TightMesh® Shelving

Wire Shelf Styles


Create simple, cost-effective, and functional storage solutions with our ventilated wire shelving. Multiple depths and styles are available to fit any space's organizational needs. Each shelf is constructed of durable steel coated with an epoxy-polyester coating for a smooth, long-lasting finish that elevates any environment.

AVAILABLE FINISHES

See page 10 for full details.



WHITE




SATIN NICKEL



GREENGUARD is the industry leader in stringent 3rd party product certification. GREENGUARD assures that Rubbermaid® wire shelving products are certified to emit minimum levels of volatile organic compounds (VOCs), including formaldehyde, to improve indoor air quality.



FreeSlide™ Shelving

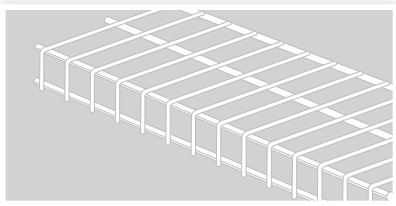


Linen

Ideal for clothes, linens, utility, and shoe storage throughout the home.



TightMesh®

Provides additional strength while keeping small items from tipping and preventing lines on clothing. Ideal for pantries, laundry shelves, and utility rooms.

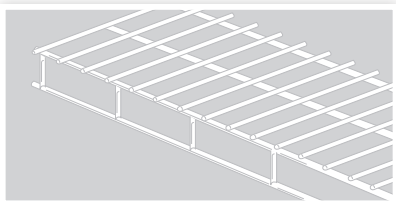

Wardrobe

Combines shelf storage with clothes hanging convenience. Ideal for smaller bedroom closets and coat closets.



FreeSlide™

Allows hangers to glide without interruption. Ideal for master closets, kids closets, and guest bedrooms.

Direct Mount Fixed Shelving


Designed to work with ½" and ⅝" thick wall materials, **Direct Mount** can be installed to fit various configurations: wall-to-wall, wall-to-open, and open-to-open. Wall brackets and poles easily mix and match for a personalized storage solution.

Rubbermaid's patented **FastSet Hardware®** with pre-loaded pins for Direct Mount is quicker to install than traditional hollow wall anchoring systems and is compatible with most standard wall systems to create long-lasting and sturdy storage solutions.




AVAILABLE FINISHES

See page 10 for full details.




WHITE




SATIN NICKEL

FASTSET HARDWARE®

PRE-LOADED BACK CLIPS




PRE-LOADED WALL BRACKETS



FastTrack® Adjustable Shelving


The Rubbermaid® **FastTrack**® system is ideal for storage spaces requiring greater flexibility and strength. The heavy-duty uprights do not require studs locations for installation, and the brackets lock simply into place for security and personalization.

FastTrack® works with all Rubbermaid shelving and can be adjusted anytime as storage requirements change or to meet ADA requirements without drilling additional holes.

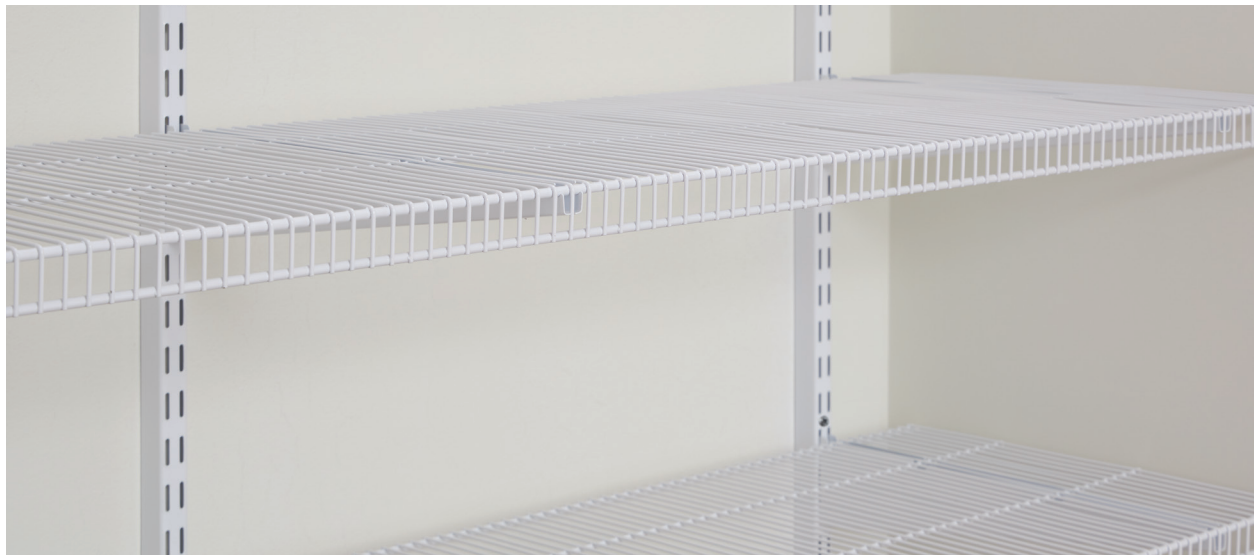


AVAILABLE FINISHES

See page 10 for full details.



WHITE

















SATIN NICKEL





The Americans with Disabilities Act (ADA) is a landmark civil rights law that protects individuals with disabilities and promotes greater accessibility in many areas. Rubbermaid® FastTrack® shelving meets ADA requirements for compliant closets and storage spaces.

Ventilated Wire Shelving System Specifications

Wire Shelf Style	Depths Available	Finishes Available
FreeSlide™		
 FreeSlide™ Shelving	12", 16"	 WHITE  SATIN NICKEL
 FreeSlide™ Corner Shelves	12"	 WHITE
TightMesh®		
 TightMesh® Shelving	9", 12", 16", 20"	 WHITE  SATIN NICKEL
Wardrobe		
 Wardrobe Shelving	12", 16"	 WHITE
 Wardrobe Corner Shelving	12"	 WHITE
Linen		
 Linen Shelving	9", 12", 16"	 WHITE

White and Satin Nickel color options are available for both Direct Mount and FastTrack® mounting systems and hardware.

Recommended Installation Heights

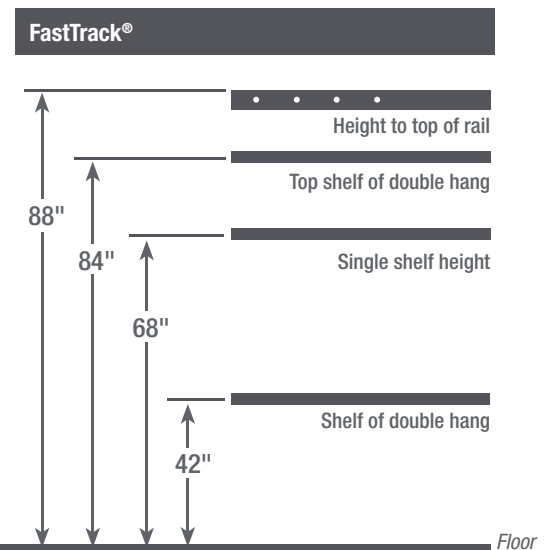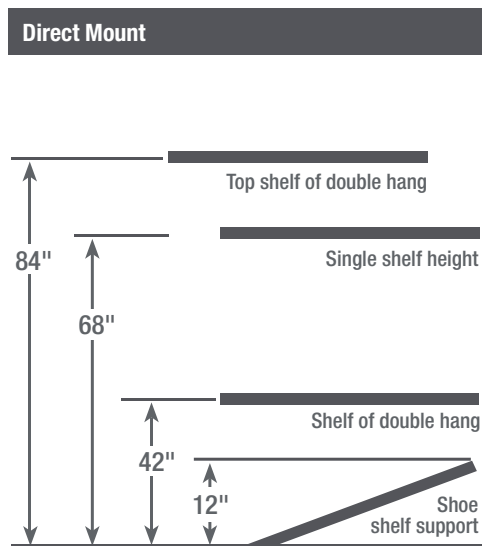

Architectural Guide Specifications

Part 1 - General

1.1 Related Documents

- A. Drawings and general provisions of contract, including general and supplementary conditions and division-1 specification sections, apply to the work of this section.

1.2 Summary

- A. This section includes the following "Ventilated Wire Storage Shelving": FreeSlide™ Shelving, TightMesh® Shelving, Double Lip Shelving, Corner Shelves, Shelf & Rod, and Linen Shelving.

1.3 Submittals

- A. Product Data: For each type of ventilated wire storage shelving specified, include details of construction and connections relative to materials, dimensions of individual components, and accessories.
- B. Samples: Of each ventilated wire storage shelving required, not less than 12 inches long in size.

1.4 Quality Assurance

- A. Single Source Responsibility: Obtain ventilated wire storage shelving from a single manufacturer.

1.5 Delivery, Storage and Handling

- A. Comply with instructions and recommendations of manufacturer for special delivery, storage, and handling requirements.
- B. Store shelving in a manner to avoid significant or permanent damage of shelves.

1.6 Coordination

- A. Coordinate layout and installation of ventilated wire storage shelving with other construction to which it is attached, including floor, partitions and wall assemblies.

1.6 Environmental Specifications

- A. GREENGUARD Certified (indoor air quality) - Emits low levels of volatile organic compounds (VOC) or formaldehyde, requires no sealants or paint during installation, promotes air circulation, preventing mold and dust.
- B. Recyclable Material - Verified by FTC Regulations: Rubbermaid's wire shelving is made from 100% recycled steel and is 100% recyclable with construction waste.

Part 2 - Products

2.1 Manufacturers

- A. Manufacturers: Subject to compliance with requirements, provide products by the following: Rubbermaid Home Products.

2.2 Materials

- A. All ventilated wire storage shelving shall be constructed of Grade C-1008 bright, basic, cold-drawn steel wire with average tensile strength of 100,000 psi.

- B. All steel wire shall be resistance welded at intersections of cross deck wires spaced at 1" increments and trimmed smooth.
- C. TightMesh® steel wire spacing shall be on 1/2" increments and trimmed smooth.

2.3 Finishes

- A. Material shall be cleaned and covered with an iron phosphate coating to ensure proper bond with finish coat.
- B. Finish all ventilated wired shelving with baked-on non-toxic and environmentally friendly epoxy coating.
- C. Finish coat shall consist of a continuous 3-5 mil epoxy-polyester hybrid powder coating to provide a hard, smooth, durable finish.

2.4 Mounting Hardware

- A. Mounting hardware components shall provide shelving installation to drywall partitions and walls, without requiring mounting to concealed structural members.
- B. Support braces are required for 36" to 42" span.
- C. Back clips shall be mounted on 12" increments beginning 1-1/2" to 2" from side wall.

2.5 Shelving Accessories

- A. Shelving installation aids available to assist in the installation of shelving components:
1. 12" and 16" installation templates
 2. 9" and 20" installation templates
 3. Pneumatic cutter
 4. Cutter replacement jaws
 5. White epoxy touch-up paint
- B. Fast Set pre-loaded installation system developed to secure shelving systems to adjacent walls.
1. 1/2" and 5/8" back clips
 2. 1/2" and 5/8" flap less back clips
 3. Wall bracket and FreeSlide wall bracket
 4. Shoe shelf support
 5. Wall anchor
- C. Support braces used to support front edge of shelving system.
1. 9", 10", 12" and 16" support brace - FastSet
- D. Miscellaneous hardware for complete installation of shelving system:
1. Small, large and TightMesh® end caps
 2. Metal corner bracket
 3. Phillips screws
 4. 1/4" anchors
 5. Rod spacer clips
 6. FreeSlide™ rod spacer cap
 7. Joiner plate set and FreeSlide™ joiner plate
 8. FreeSlide™ joiner plate and rod spanner
 9. All-purpose clamp
 10. Wall bracket and FreeSlide™ wall bracket
 11. Angle wall bracket
 12. Anchor-less back clips
 13. Shoe shelf support
 14. Shelf edge trim
 15. F channel, 8 ft. lengths

- E. Pole Systems
1. 68" and 84" poles
 2. Square pole cap
 3. #8 self-tapping screw
 4. Pole clamp and TightMesh® pole clamp
 5. 1/2" self-tapping screw

2.6 Fabrication

- A. Fabricate ventilated wire storage shelving square, rigid, flat, and free of dents or distortion. Fabricate connections to form a rigid structure, free of buckling and warping.

Part 3 - Execution

3.1 Inspection

- A. Examine areas and conditions for compliance with requirements for installation tolerances, clearances, and other conditions affecting installation.
- B. Examine walls to which ventilated wire storage shelving will be attached for proper selection of appropriate fastening hardware.
- C. Installation hardware shall be included which does not require attachment to concealed structural framing.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 Installation

- A. Install shelving system and accessories after finishing operations, including painting have been completed. Install system to comply with final layout drawings, in strict compliance with manufacturers printed instructions. Position units level, plumb at proper location relative to adjoining units and related work. Adjust accessories to provide visually acceptable installation.

3.3 Field Quality Control

- A. Remove and replace shelving components that are chipped, scratched, or otherwise damaged and which do not match adjoining work. Provide new matching units, installed as specified and in manner to eliminate evidence of replacement.

3.4 Adjust

- A. Adjust components and accessories to provide visually acceptable installation.

3.5 Cleaning

- A. Remove surplus materials, rubbish and debris resulting from installation upon completion of work and leave areas of installation in neat, clean condition.

Shelving Load Capacities

Open to Open			Wall to Open			Wall to Wall		
Shelf Length	Total Weight*	Per Lineal Ft.	Shelf Length	Total Weight*	Per Lineal Ft.	Shelf Length	Total Weight*	Per Lineal Ft.
1 ft.	75	75	1 ft.	90	90	1 ft.	105	105
2 ft.	130	65	2 ft.	140	70	2 ft.	150	75
3 ft.	135	45	3 ft.	150	50	3 ft.	180	60
4 ft.	160	40	4 ft.	180	45	4 ft.	220	55
5 ft.	175	35	5 ft.	200	40	5 ft.	250	50
over 6 ft.	180	30	over 6 ft.	210	35	over 6 ft.	252	42

*Based on recommended installation methods. Load capacity will vary depending on specific applications.

- Use an All-Purpose Clamp (one at least every 4 ft.) to secure shelf to back wall. All-Purpose Clamps install into studs located along the back wall at desired shelf height.
- Open end shelf installations require one support brace 1" from open end of shelf.
- Back clips are to be placed at maximum distance of 12" along back wall for all applications.
- Shelf-over-shelf or stacked shelf system must be 13" apart to allow room for Support Braces.



©2023 Rubbermaid Incorporated
8900 Northpointe Executive Park Drive, Huntersville, NC 28078
www.rubbermaidpro.com
1-877-533-1197

5/23 | 233298726

Reorder # 2203131

Rubbermaid



Rubbermaid®

RUBBERMAID LIMITED LIFETIME WARRANTY

Rubbermaid manufactures durable, high quality merchandise. We warrant that when professionally installed, our wire, melamine and garage storage systems, including installation hardware, are free of defects in materials or workmanship for the life of the product.

Rubbermaid will replace any defective product or installation hardware at no charge. Rubbermaid is not responsible for any labor charges associated with uninstalling or reinstalling the shelving or hardware.

This warranty is valid only if the product has been assembled and maintained per the instructions or standard industry practices. This warranty does not cover abuse, accident, cosmetic issues such as fading or scratches from normal wear, or any other cause not arising from defects in material and workmanship. Also, consequential and incidental damages are not recoverable under this warranty.

This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Consumer Toll Free Help Line: 1-877-533-1197
www.rubbermaidpro.com

Item # 2119700



Congratulations on your new high-performance, energy efficient home with an efficient fresh air ventilation system. The Fresh In™ supply fan provides controlled fresh air from outside and introduces it into your home.


The Fresh In™ system provides the fresh air needed in today's tightly built, energy efficient homes to ensure home inhabitants are receiving fresh air without having to open windows. The unit features the most energy efficient "DC" motor and is Energy Star™ rated. No other fresh air option is as efficient as Fresh In™.

Fresh In™ provides the correct amount of outside air at the most opportune times for both temperature and humidity. Fresh In™ monitors outside conditions and operates when best to provide fresh air into the home.

OPERATION AND SERVICE DETAILS

Fresh In™ does have features that can be selected to make the living environment of the home more appealing should you decide to change. The unit is set-up initially on the setting that provides fresh air based upon the state and local code requirements. This setting has the unit run along with air handler, to a specific CFM per hour requirement based on home size and occupants. This is what is recommended by code and provides the best indoor air quality.

There are other settings that can be selected to better meet your needs if you should desire not to have the unit run as much. Fresh In™ has five (5) different "Comfort" settings and can be selected based on the climate zone of where the home is located.

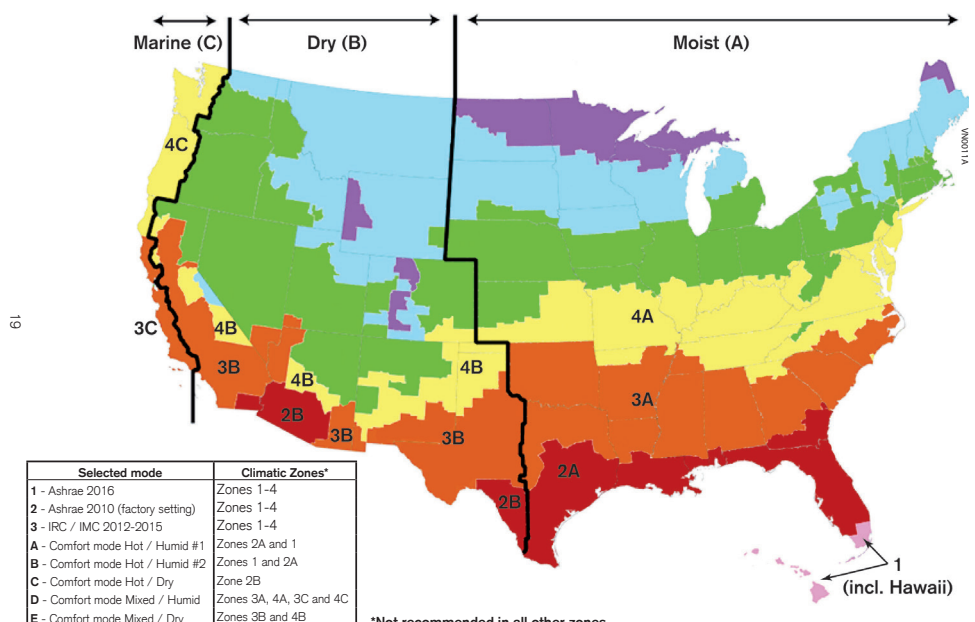



Got 30 seconds?

You can replace the MERV 8 or MERV 13 filter in no time at all. Open the access panel, remove the filter cartridge and slide a new one in. That's it!

Although Fresh In™ is designed to last a very long time, it does require cleaning the filter every six (6) months. This is a very easy task by turning off the unit, opening the access door, removing the aluminum mesh filter, rinsing off or placing in dishwasher and replacing when dry. Doing this every six (6) months will ensure the longevity of your Fresh In™ and provide the best air quality for you and your family

Fresh In™ has a five (5) year limited warranty. Should you experience any issues with your Fresh In™ after the home warranty expires, please call Broan Tech Services at 800-637-1453.

Once again, congratulations on your new home and are rest assured that Broan will be providing a better living environment for you and your family!

STEP INSIDE FOR FRESH AIR.